

1A Current Limited Load Switch

General Description

The AP1610 Smart Switch is a current limited P-channel MOSFET power switch designed for high-side load switching applications. This switch operates with inputs ranging from 2.4V to 5.5V, making it ideal for both 3V and 5V systems. An integrated current-limiting circuit protects the input supply against large currents which may cause the supply to fall out of regulation. The AP1610 is also protected from thermal overload which limits power dissipation and junction temperatures. It can be used to control loads that require up to 1A. Current limit threshold is programmed with a resistor from SET to ground. The quiescent supply current is typically a low 9 μ A. In shutdown mode, the supply current decreases to less than 1 μ A.

The AP1610 is available in a Pb-free 5-pin SOT23 package and is specified over the -40°C to +85°C temperature range.

Applications


- Hot Swap Supplies
- Notebook Computers
- Peripheral Ports
- Personal Communication Devices

Features

- Input Voltage Range: 2.4V to 5.5V
- Programmable Over-Current Threshold
- Fast Transient Response:
 - 400ns Response to Short Circuit
- Low Quiescent Current
 - 9 μ A Typical
 - 1 μ A Max with Switch Off
- 200m Ω Typical $R_{DS(ON)}$
- Only 2.5V Needed for ON/OFF Control
- Under-Voltage Lockout
- Thermal Shutdown
- 4kV ESD Rating
- 5-Pin SOT23
- Temperature Range: -40°C to +85°C

Package

SOT-23-5L

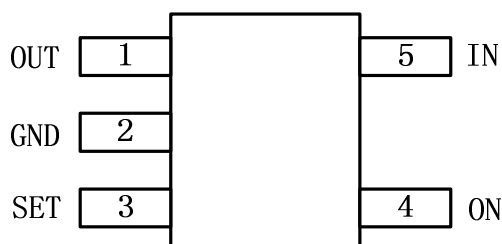

Typical Application Circuit

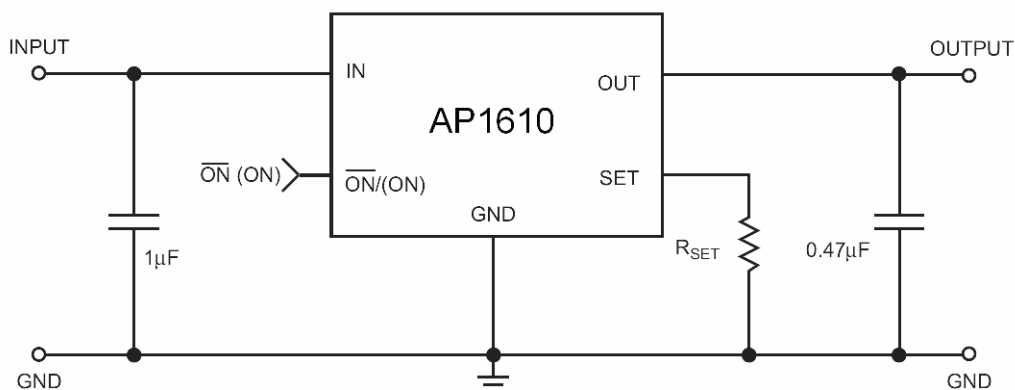


Figure 1. Basic Application Circuit with AP1610

Pin Description

Pin No.	Pin Name	Pin Function
1	OUT	P-channel MOSFET drain. Connect a 0.47 μ F capacitor from OUT to GND.
2	GND	Ground connection.
3	SET	Current limit set input. A resistor from SET to ground sets the current limit for the switch.
4	ON	Enable input. Two versions are available, active-high and active-low. See Ordering Information for details.
5	IN	P-channel MOSFET source. Connect a 1 μ F capacitor from IN to GND.

Functional Block Diagram

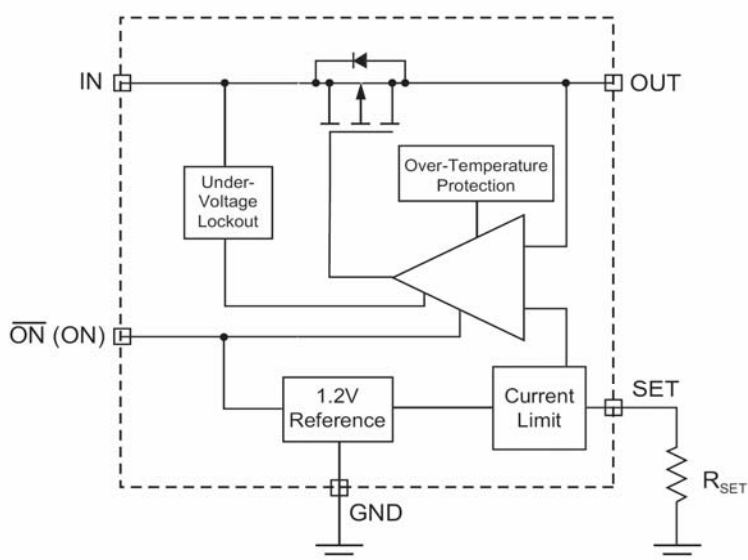


Figure 2. Block Diagram

Absolute Maximum Ratings

$T_A = 25^\circ\text{C}$, unless otherwise noted

Symbol	Description	Value	Units
V_{IN}	IN to GND	-0.3 to 7	V
V_{ON}	ON(\overline{ON}) to GND	-0.3 to $V_{IN} + 0.3$	V
V_{SET}, V_{OUT}	SET, OUT to GND	-0.3 to $V_{IN} + 0.3$	V
I_{MAX}	Maximum Continuous Switch Current	2	A
T_J	Operating Junction Temperature Range	-40 to 150	$^\circ\text{C}$
T_{LEAD}	Soldering Temperature (Soldering, 10s)	260	$^\circ\text{C}$
V_{ESD}	ESD Rating ¹ - HBM	4000	V

Thermal Characteristics²

Symbol	Description	Value	Units
Θ_{JA}	Thermal Resistance	150	°C/W
P_D	Power Dissipation	667	mW

Stresses above those listed in Absolute Maximum Ratings may cause permanent damage to the device. Functional operation at conditions other than the operating conditions specified is not implied. Only one Absolute Maximum Rating should be applied at any one time.

- Human body model is a 100pF capacitor discharged through a 1.5kΩ resistor into each pin.
- Mounted on a demo board.

Electrical Characteristics


$V_{IN} = 5V$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, unless otherwise noted. Typical values are $T_A = 25^{\circ}C$

Symbol	Description	Conditions	Min	Typ	Max	Units
V_{IN}	Operation Voltage		2.4		5.5	V
I_Q	Quiescent Current	$V_{IN} = 5V$, $ON(\overline{ON}) = \text{Active}$, $I_{OUT} = 0$		7	25	μA
$I_{Q(OFF)}$	Off Supply Current	$ON(\overline{ON}) = \text{Inactive}$, $V_{IN} = 5.5V$			1	μA
$I_{SD(OFF)}$	Off Switch Current	$ON(\overline{ON}) = \text{Inactive}$, $V_{IN} = 5.5V$, $V_{OUT} = 0$		0.01	1	μA
V_{UVLO}	Under-Voltage Lockout	Rising Edge, 1% Hysteresis		1.8	2.4	V
		$V_{IN} = 5.0V$, $T_A = 25^{\circ}C$		200		mΩ
$R_{DS(ON)}$	On Resistance	$V_{IN} = 4.5V$, $T_A = 25^{\circ}C$		210		
		$V_{IN} = 3.0V$, $T_A = 25^{\circ}C$		250		
TC_{RDS}	On Resistance Temperature Coefficient			2800		ppm/°C
I_{LIM}	Current Limit	$R_{SET} = 7.2k\Omega$	0.75	1	1.25	A
$I_{LIM(MIN)}$	Minimum Current Limit			130		mA
$V_{ON(L)}$	$ON(\overline{ON})$ Input Low Voltage	$V_{IN} = 2.7V$ to $5.5V$			0.8	V
$V_{ON(H)}$	$ON(\overline{ON})$ Input High Voltage	$V_{IN} = 2.7V$ to $< 4.2V$	2.0			
		$V_{IN} \geq 4.2V$ to $5.0V$	2.4			
$I_{ON(SINK)}$	$ON(\overline{ON})$ Input Leakage	$V_{ON} = 5.5V$		0.01	1	μA
T_{RESP}	Current Limit Response Time	$V_{IN} = 5V$		50		μs
T_{OFF}	Turn-Off Time	$V_{IN} = 5V$, $R_L = 10\Omega$		10	16	μs
T_{ON}	Turn-On Time	$V_{IN} = 5V$, $R_L = 10\Omega$		14	200	μs
T_{SD}	Over-Temperature Threshold	$V_{IN} = 5V$	T_J Increasing	125		°C
			T_J Decreasing	115		


Typical Characteristics

Unless otherwise noted, $V_{IN} = 5V$, $T_A = 25^\circ C$.


Quiescent Current vs. Temperature

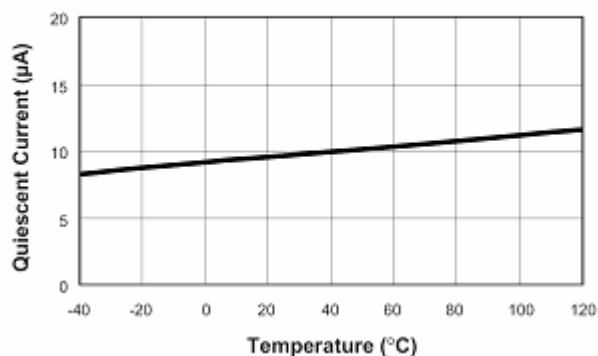


Quiescent Current vs VIN

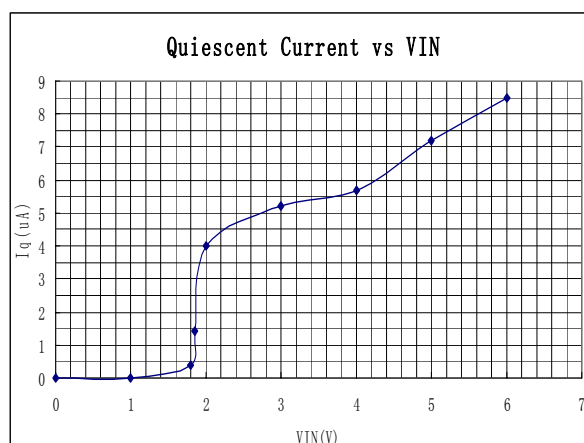

Off-Supply Current vs. Temperature

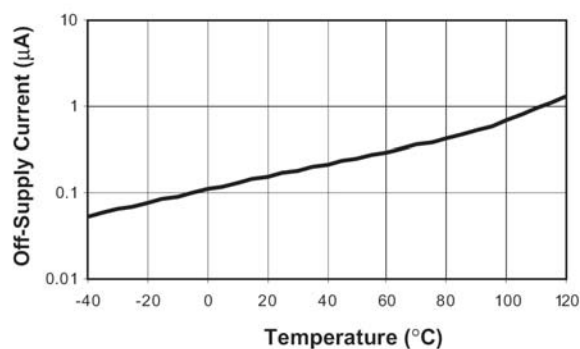


Off-Switch Current vs. Temperature

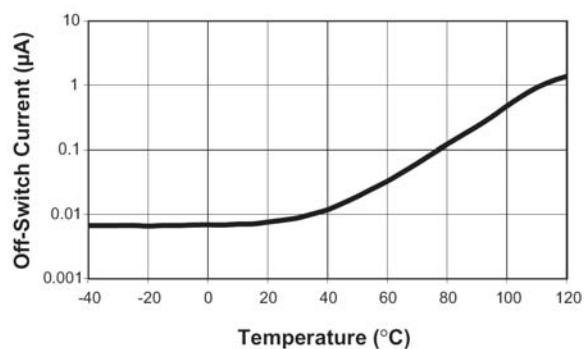


Turn-On vs. Temperature

($R_{LOAD} = 10\Omega$; $C_{LOAD} = 0.47\mu F$)

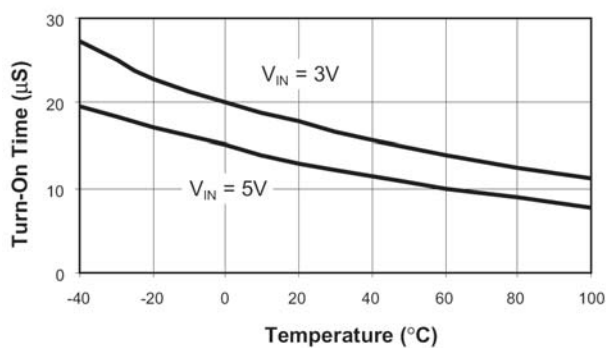


Turn-Off vs. Temperature

($R_{LOAD} = 10\Omega$; $C_{LOAD} = 0.47\mu F$)

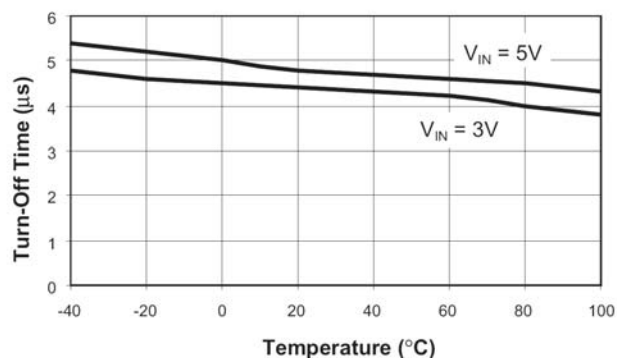


VIN=5V, RL=10Ω, COUT=0.47μF (Channel3=VEN, Channel2=VO)


Turn on

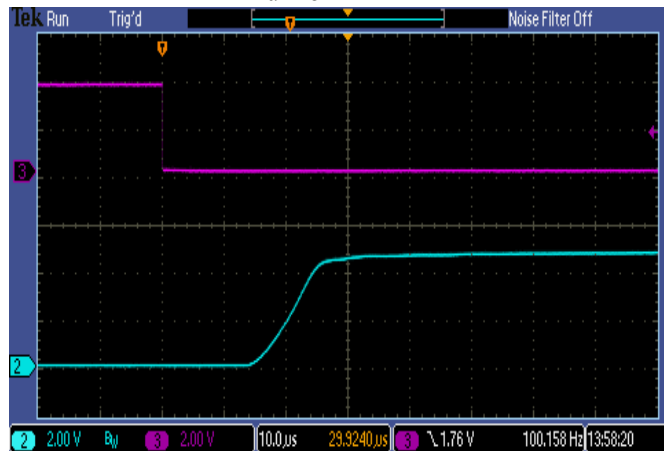

Turn off



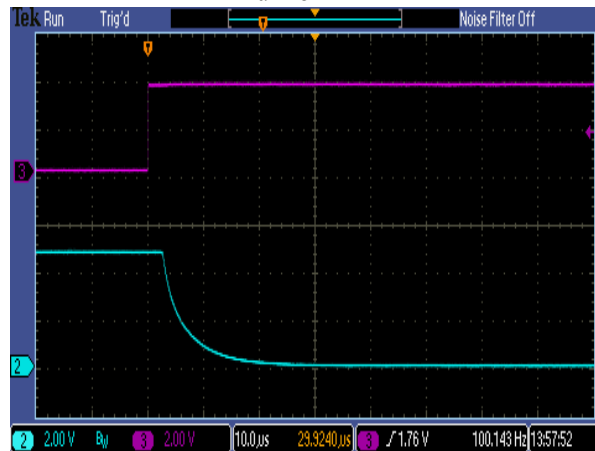


Short circuit to GND

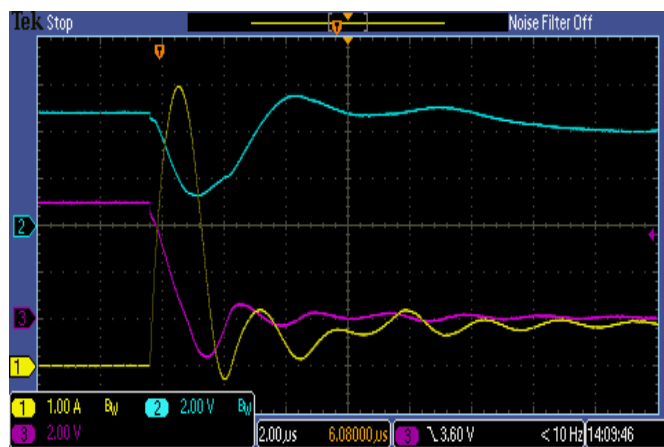

Channel1=IO, Channel2=Vin, Channel3=Vo

VON vs VIN

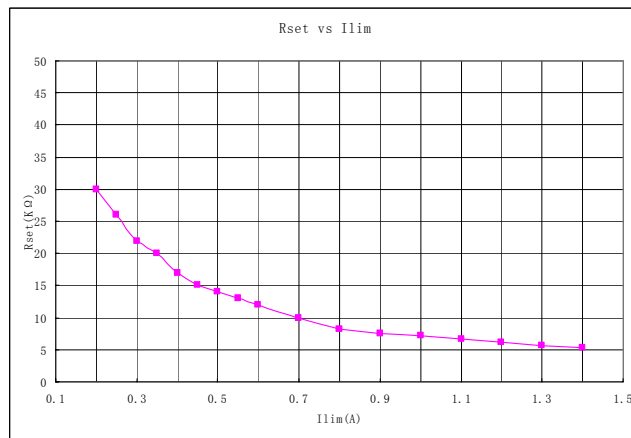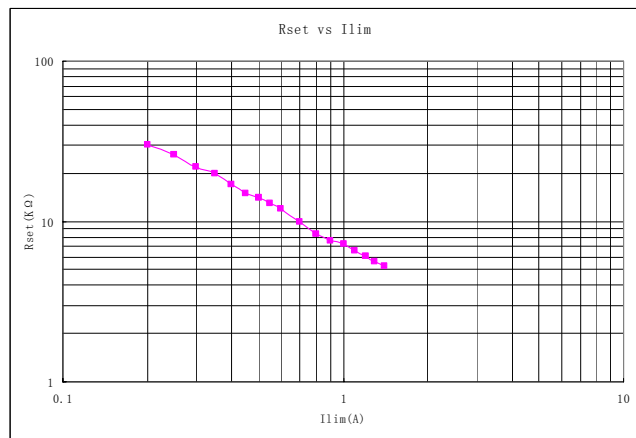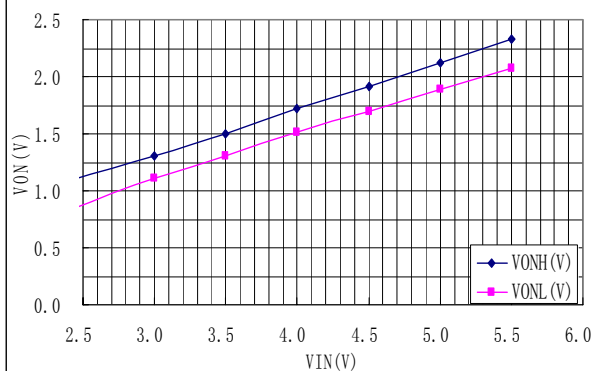

Ordering Information

Part Number	Mark	Package	Description
AP1610ES5-LFKR	11XY ¹	SOT-23-5L	Low Level Active
AP1610ES5-HFKR	12XY ¹	SOT-23-5L	High Level Active
AP1610ES5-LFKRG ²	11XY ¹	SOT-23-5L	Low Level Active
AP1610ES5-HFKRG ²	12XY ¹	SOT-23-5L	High Level Active


1.XY= date code

2.G =Green Package

Application Information

Setting Current Limit

In most applications, the variation in I_{LIM} must be taken into account when determining R_{SET} . The I_{LIM} variation is due to processing variations from part to part, as well as variations in the voltages at IN and OUT, plus the operating temperature. These three factors add up to a $\pm 25\%$ tolerance. Figure 3 illustrates a cold device with a statistically higher current limit and a hot device with a statistically lower current limit, both with R_{SET} equal to $10k\Omega$. While the chart, " R_{SET} vs. I_{LIM} " indicates an I_{LIM} of $0.7A$ with an R_{SET} of $10k\Omega$, this figure shows that the actual current limit will be at least $0.525A$ and no greater than $0.880A$.

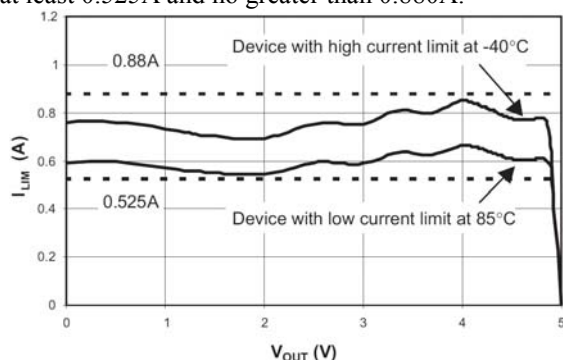Figure 3: Current Limit Using $10k\Omega$.

To determine R_{SET} , start with the maximum current drawn by the load and multiply it by 1.33 (typical I_{LIM} = minimum I_{LIM} / 0.75). This is the typical current limit value. Next, refer to " R_{SET} vs. I_{LIM} " and find the R_{SET} that corresponds to the typical current limit value. Choose the largest resistor available that is less than or equal to it. For greater precision, the value of R_{SET} may also be calculated using the I_{LIM} R_{SET} product found in the chart " R_{SET} Coefficient vs. I_{LIM} ." The maximum current is derived by multiplying the typical current for the chosen R_{SET} in the chart by 1.25. A few standard resistor values are listed in the table "Current Limit R_{SET} Values."

Current Limit R_{SET} Values

RSET (kΩ)	Current Limit Typ (mA)	Device Will Not Current Limit Below (mA)	Device Always Current Limits Below (mA)
30	200	150	250
26	250	188	313
22	300	225	375
20	350	263	438
17	400	300	500
15	450	338	563
14	500	375	625
13	550	413	688
12	600	450	750
10	700	525	875
8.3	800	600	1000
7.8	900	675	1125
7.2	1000	750	1250
6.6	1100	825	1375
6.1	1200	900	1500
5.6	1300	975	1625
5.3	1400	1050	1750

Example: A USB port requires $0.5A$. $0.5A$ multiplied by 1.33 is $0.665A$. From the chart named " R_{SET} vs. I_{LIM} ," R_{SET} should be less than $12k\Omega$. $10k\Omega$ is a standard value that is a little less than $12k\Omega$ but very close. The chart reads approximately $0.700A$ as a typical I_{LIM} value for $10k\Omega$. Multiplying $0.700A$ by 0.75 and 1.25 shows that the AP1610 will limit the load current to greater than $0.525A$ but less than $0.875A$.

Operation in Current Limit

When a heavy load is applied to the output of the AP1610, the load current is limited to the value of I_{LIM} determined by R_{SET} . See Figure 4, "Overload Operation." Since the load is demanding more current than I_{LIM} , the voltage at the output

drops. This causes the AP1610 to dissipate a larger than normal quantity of power, and its die temperature to increase. When the die temperature exceeds an over-temperature limit, the AP1610 will shut down until it has cooled sufficiently, at which point it will startup again. The AP1610 will continue to cycle on and off until the load is removed, power is removed, or until a logic high level is applied to ON.

Enable Input

In many systems, power planes are controlled by integrated

circuits which run at lower voltages than the power plane itself. The enable input ON of the AP1610 has low and high threshold voltages that accommodate this condition. The threshold voltages are compatible with 5V TTL and 2.5V to 5V CMOS.

Reverse Voltage

The AP1610 is designed to control current flowing from IN to OUT. If a voltage is applied to OUT which is greater than the voltage on IN, large currents may flow. This could cause damage to the AP1610


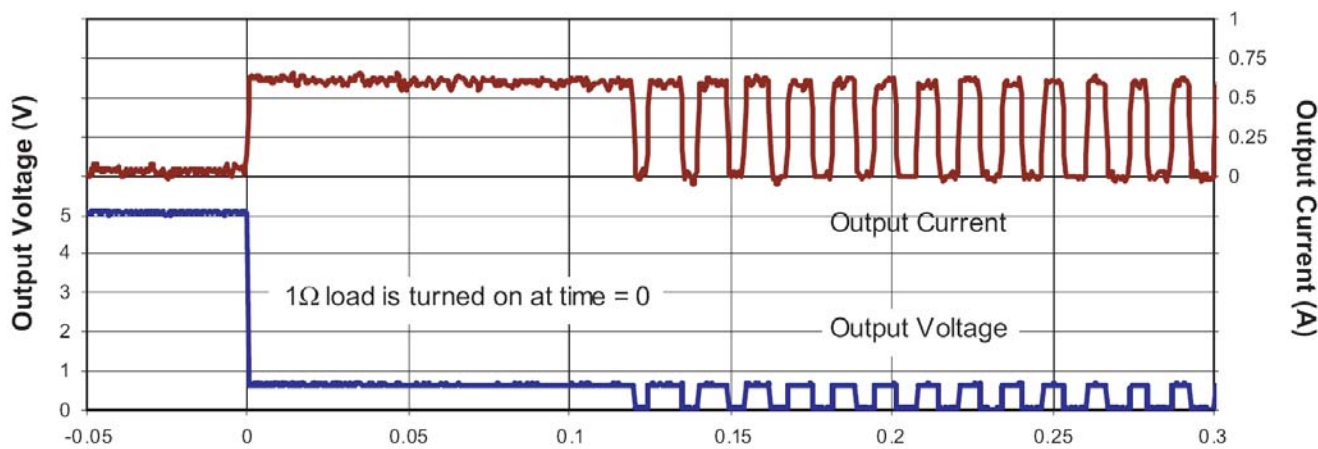


Figure 4: Overload Operation

Package Information

SOT-23-5L PACKAGE OUTLINE DIMENSIONS

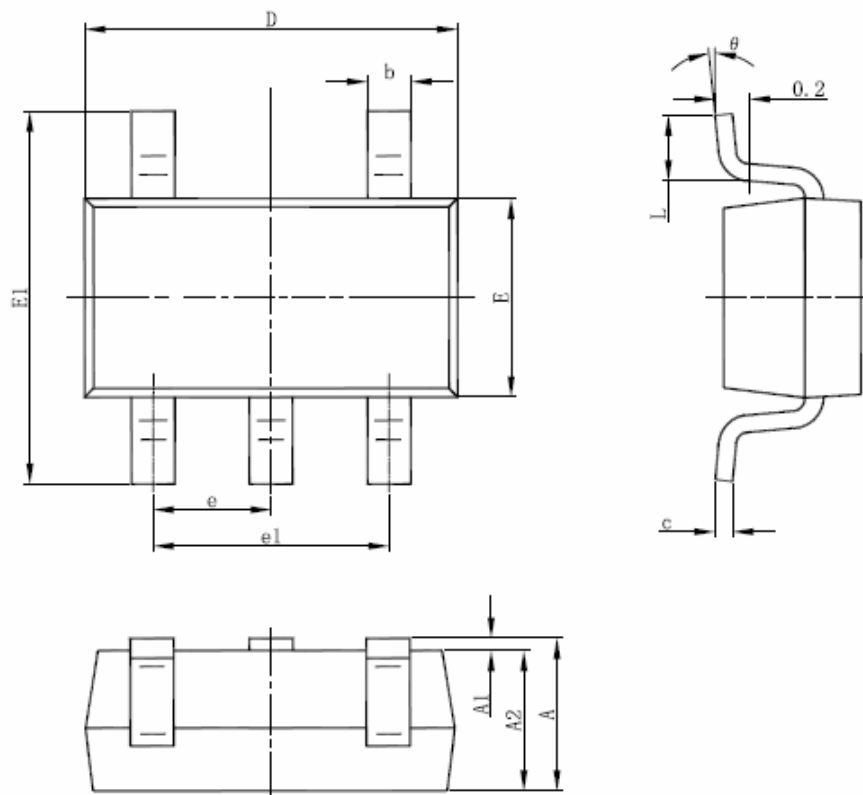

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

Important Notice

Chipown Microelectronics Co. Ltd. reserves the right to make changes without further notice to any products or specifications herein. Chipown Microelectronics Co. Ltd. does not assume any responsibility for use of any its products for any particular purpose, nor does Chipown Microelectronics Co. Ltd assume any liability arising out of the application or use of any its products or circuits. Chipown Microelectronics Co. Ltd does not convey any license under its patent rights or other rights nor the rights of others