

2329907-1 ✓ ACTIVE

[Power Versa-Lock](#) | [Power Versa-Lock 5.0](#)

TE Internal #: 2329907-1

Power Versa-Lock 5.0, Power Contacts, Contact, Operating Voltage 600 VAC, Operating Voltage 600 VDC, Pre-Tin, 16 – 14AWG Wire Size

[View on TE.com >](#)



Connectors > Power Connectors > Power Contacts



Power Contact Type: **Contact**

Operating Voltage: **600 VDC**

Contact Mating Area Plating Material: **Pre-Tin**

Wire Size: **16 – 14 AWG**

## Features

### Product Type Features

Power Contact Type	Contact
Connector System	Wire-to-Wire
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable

### Electrical Characteristics

Continuous Current Rating	15 A
Operating Voltage	600 VDC

### Contact Features

Contact Mating Area Plating Material	Pre-Tin
Contact Current Rating (Max)	15 A
Contact Type	Tab
Contact Retention Within Housing	Without
Mating Tab Width	1.5 mm[.06 in]
Mating Tab Thickness	.5 mm[.02 in]
Contact Base Material	Brass
Wire Contact Termination Area Plating Material	Pre-Tin
Wire Contact Termination Area Plating Material Finish	Matte
Contact Orientation	Straight



### Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

### Mechanical Attachment

Carrier Strip Mount Orientation	Side Feed
Connector Mounting Type	Panel Mount
Wire Insulation Support	With

### Dimensions

Wire Size	1.3 – 2 mm <sup>2</sup>
Accepts Wire Insulation Diameter Range	2.3 – 3.5 mm [.091 – .138 in]

### Usage Conditions

Operating Temperature Range	-30 – 105 °C [-22 – 221 °F]
-----------------------------	-----------------------------

### Operation/Application

Circuit Application	Power
---------------------	-------

### Packaging Features

Packaging Method	Reel
------------------	------

### Other

Wire/Cable Type	Discrete Wire
Wire Type	Stranded
For Use With	Cap Housing, Rear Seal

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


## Compatible Parts



TE Part # 234914-1  
EXT TOOL FOR POWER DBL LOK TAB



TE Part # 1-2336231-6  
Power Versa-Lock TNL CAP, 2X3 KEY A



TE Part # 1-2337219-6  
Power Versa-Lock CAP, 2X3 KEY A



TE Part # 1-2345729-1  
Power Versa-Lock FH CAP, 1X1 KEY A



TE Part # 1-2378158-2  
Power Versa-Lock CAP, 1X2 KEY A



TE Part # 1-2378158-3  
Power Versa-Lock CAP, 1X3 KEY A



TE Part # 2-2336231-6  
Power Versa-Lock TNL CAP, 2X3 KEY B



TE Part # 2-2378158-2  
Power Versa-Lock CAP, 1X2 KEY B




TE Part # 2-2378158-3  
Power Versa-Lock CAP, 1X3 KEY B



TE Part # 2837355-1  
OCEAN\_2\_0\_Applicator-S-080F1300



TE Part # 3-2336231-6  
Power Versa-Lock TL CAP, 2X3 KEY C



TE Part # 3-2378158-2  
Power Versa-Lock CAP, 1X2 KEY C



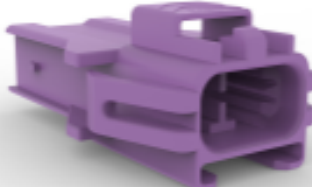

TE Part # 3-2378158-3  
Power Versa-Lock CAP, 1X3 KEY C



TE Part # 4-2378158-2  
Power Versa-Lock CAP, 1X2 KEY D



TE Part # 5-2378158-2  
Power Versa-Lock CAP, 1X2 KEY E



TE Part # 6-2378158-2  
Power Versa-Lock CAP, 1X2 KEY F



TE Part # 7-2378158-2  
Power Versa-Lock CAP, 1X2 KEY G



TE Part # 7-2837355-1  
OCEAN\_2.0\_Applicator-S-080F1300




TE Part # 7-2837355-2  
OCEAN\_2.0\_Applicator-S-080F1300




TE Part # 7-2837355-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-080F1300


Also in the Series | **Power Versa-Lock 5.0**




Insertion & Extraction Tools(2)




Power Contacts(8)




Rectangular Caps & Covers(3)



Rectangular Connector Locking(1)



Rectangular Connector Seals(6)



Rectangular Power Connectors(33)

Customers Also Bought



TE Part #1623733-9  
SBCHE7 470R 5%



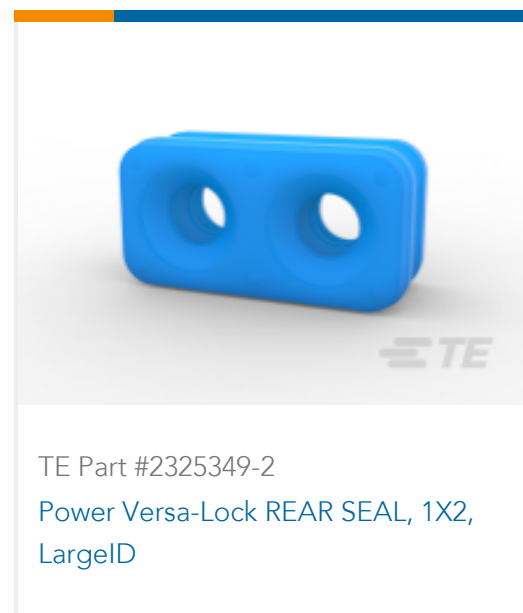
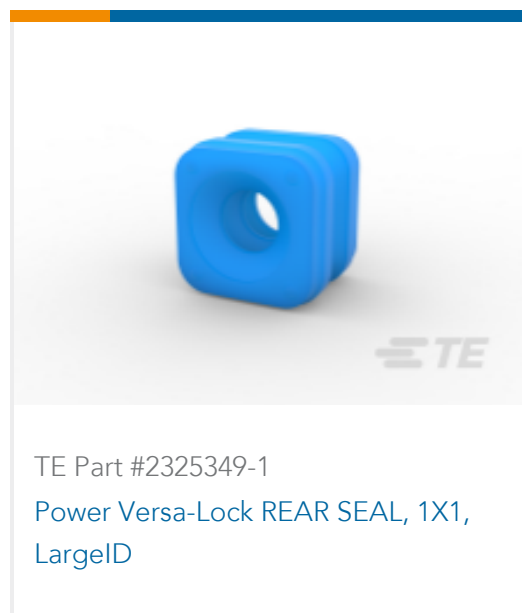
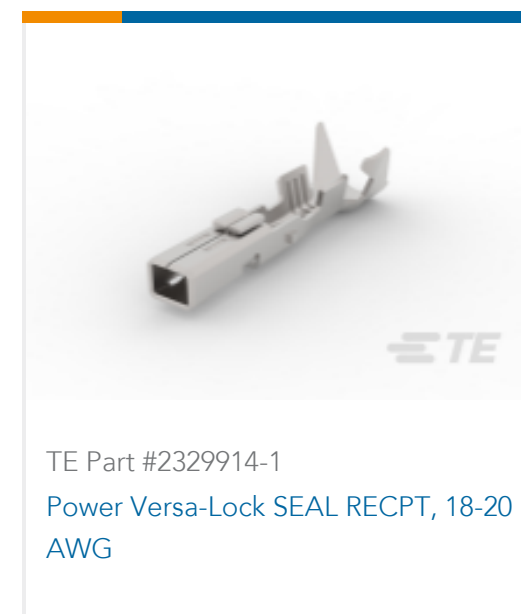
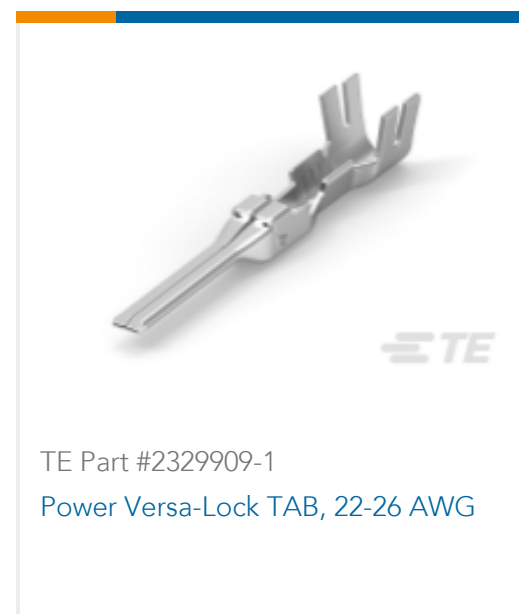
TE Part #1-2345728-1  
Power Versa-Lock PLUG, 1X1 KEY A



TE Part #1-2345729-1  
Power Versa-Lock FH CAP, 1X1 KEY A



TE Part #2-2378158-2  
Power Versa-Lock CAP, 1X2 KEY B



## Documents

### CAD Files

#### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_2329907-1\\_A.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_2329907-1\\_A.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_2329907-1\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications

#### Application Specification

English

### Product Environmental Compliance

#### Product Compliance

English

#### Product Compliance

English

### Instruction Sheets

#### Instruction Sheet (U.S.)

English

2329907-1

Power Versa-Lock 5.0, Power Contacts, Contact, Operating Voltage 600 VAC,  
Operating Voltage 600 VDC, Pre-Tin, 16 – 14AWG Wire Size

