# 2329914-1 - ACTIVE

### Power Versa-Lock | Power Versa-Lock 5.0

TE Internal #: 2329914-1 Power Versa-Lock 5.0, Power Contacts, Contact, Operating Voltage 600 VAC, Operating Voltage 600 VDC, Pre-Tin, 20 – 18AWG Wire Size

### View on TE.com >

#### Connectors > Power Connectors > Power Contacts



Power Contact Type: Contact Operating Voltage: 600 VDC Contact Mating Area Plating Material: Pre-Tin Wire Size: 20 – 18 AWG

## Features

### **Product Type Features**

Power Contact Type	Contact
Connector System	Wire-to-Wire
Sealable	Yes



Connector & Contact Terminates To	Wire & Cable
Electrical Characteristics	
Continuous Current Rating	8 A
Operating Voltage	600 VDC
Contact Features	
Contact Mating Area Plating Material	Pre-Tin
Contact Current Rating (Max)	8 A
Contact Type	Receptacle
Contact Retention Within Housing	Without
Mating Tab Width	1.5 mm[.06 in]
Mating Tab Thickness	.05 mm[.02 in]
Contact Base Material	Copper Alloy
Wire Contact Termination Area Plating Material	Pre-Tin
Contact Orientation	Straight

**C** For support call+1 800 522 6752

Power Versa-Lock 5.0, Power Contacts, Contact, Operating Voltage 600 VAC, Operating Voltage 600 VDC, Pre-Tin, 20 – 18AWG Wire Size



Termination Method to Wire & Cable	Crimp	
Mechanical Attachment		
Carrier Strip Mount Orientation	Side Feed	
Connector Mounting Type	Panel Mount	
Wire Insulation Support	With	
Dimensions		
Wire Size	.5 – .8 mm²	
Accepts Wire Insulation Diameter Range	1.7 – 2.8 mm[.067 – .11 in]	
Usage Conditions		
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]	
Operation/Application		
Circuit Application	Power	
Packaging Features		
Packaging Method	Reel	
Other		
Wire/Cable Type	Discrete Wire	
Wire Type	Stranded	

For Use With

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Not Yet Reviewed	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not reviewed for solder process capability	

Power Versa-Lock 5.0, Power Contacts, Contact, Operating Voltage 600 VAC, Operating Voltage 600 VDC, Pre-Tin, 20 – 18AWG Wire Size



#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**



TE	TE	TE	
TE Part # 1-2378159-3	TE Part # 2-2336229-6	TE Part # 2-2378159-2	TE Part # 2-2378159-3
Power Versa-Lock PLUG, 1X3 KEY A	Power Versa-Lock PLUG, 2X3 KEY B	Power Versa-Lock PLUG, 1X2 KEY B	Power Versa-Lock PLUG, 1X3 KEY B
T	TE REPORT	TE TE	
TE Part # 2837357-1	TE Part # 3-2336229-6	TE Part # 3-2378159-2	TE Part # 3-2378159-3
OCEAN_2.0_Applicator-S-070F114O	Power Versa-Lock PLUG, 2X3 KEY C	Power Versa-Lock PLUG, 1X2 KEY C	Power Versa-Lock PLUG, 1X3 KEY C
TE Part # 4-2378159-2	TE Part # 5-2378159-2	TE Part # 6-2378159-2	TE Part # 7-2378159-2
Power Versa-Lock PLUG, 1X2 KEY D	Power Versa-Lock PLUG, 1X2 KEY E	Power Versa-Lock PLUG, 1X2 KEY F	Power Versa-Lock PLUG, 1X2 KEY G

Power Versa-Lock 5.0, Power Contacts, Contact, Operating Voltage 600 VAC, Operating Voltage 600 VDC, Pre-Tin, 20 – 18AWG Wire Size






TE Part # 7-2837357-1 OCEAN\_2.0\_Applicator-S-070F114O




TE Part # 7-2837357-2 OCEAN\_2.0\_Applicator-S-070F114OA

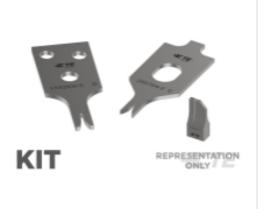

TE Part # 7-2837357-7 OCEAN\_2.0\_SPARE\_PART\_KIT-070F114O



## Also in the Series | Power Versa-Lock 5.0

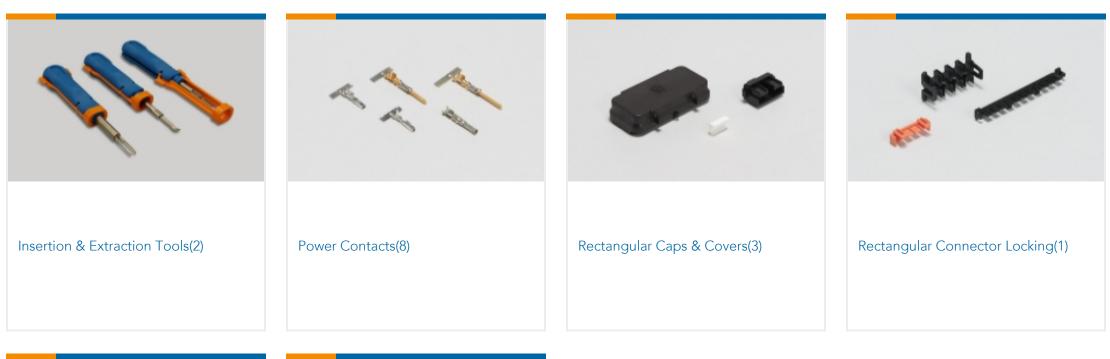








## Customers Also Bought

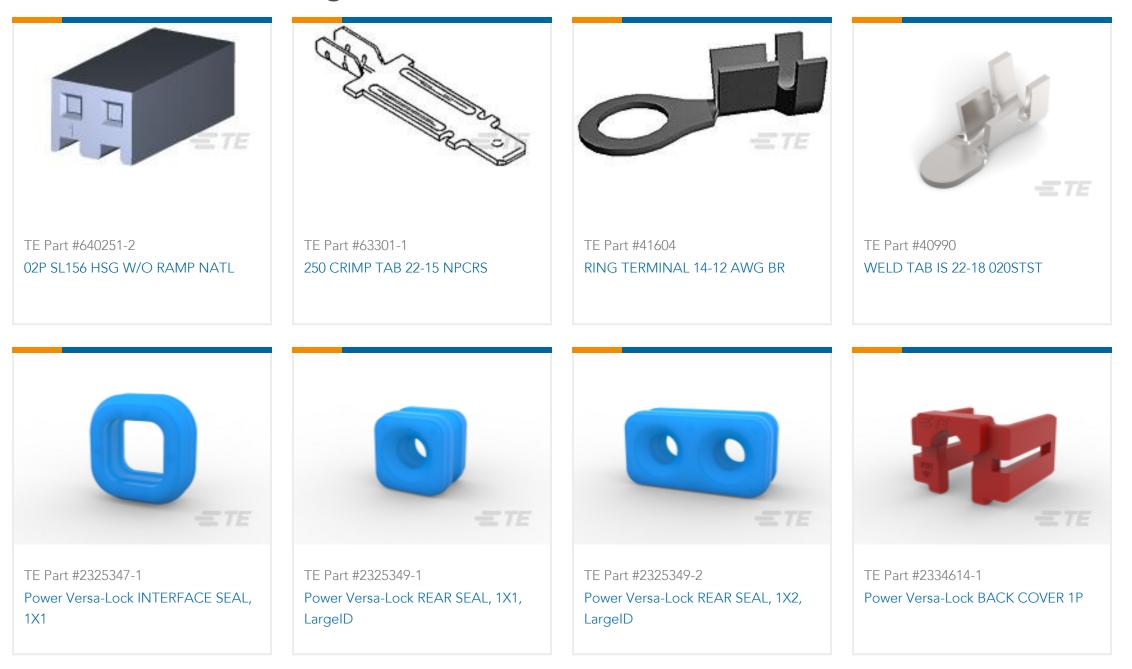

Power Versa-Lock 5.0, Power Contacts, Contact, Operating Voltage 600 VAC, Operating Voltage 600 VDC, Pre-Tin, 20 – 18AWG Wire Size





## Documents

Product Drawings

Power Versa-Lock SEAL RECPT, 18-20 AWG

English

**CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_2329914-1\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2329914-1\_A.3d\_igs.zip

English

Customer View Model

### ENG\_CVM\_CVM\_2329914-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

**Product Environmental Compliance** 

**Product Compliance** 

English

**Product Compliance** 

English

Instruction Sheets Instruction Sheet (U.S.) English