



Button-type Li/MnO₂ Battery

锂二氧化锰扣式电池




● Characteristics

- 1.High-voltage (3V)
- 2.Wide working temperature range
- 3.Stable discharge voltage
- 4.Excellent safety performance
- 5.Excellent storage performance and low self-discharge rate

● 特性

- 1、单只电池电压高（3V）
- 2、放电电压稳定可靠
- 3、储存性能好，年自放电率低
- 4、使用温度范围广
- 5、安全性能优良

Cross section 剖面图

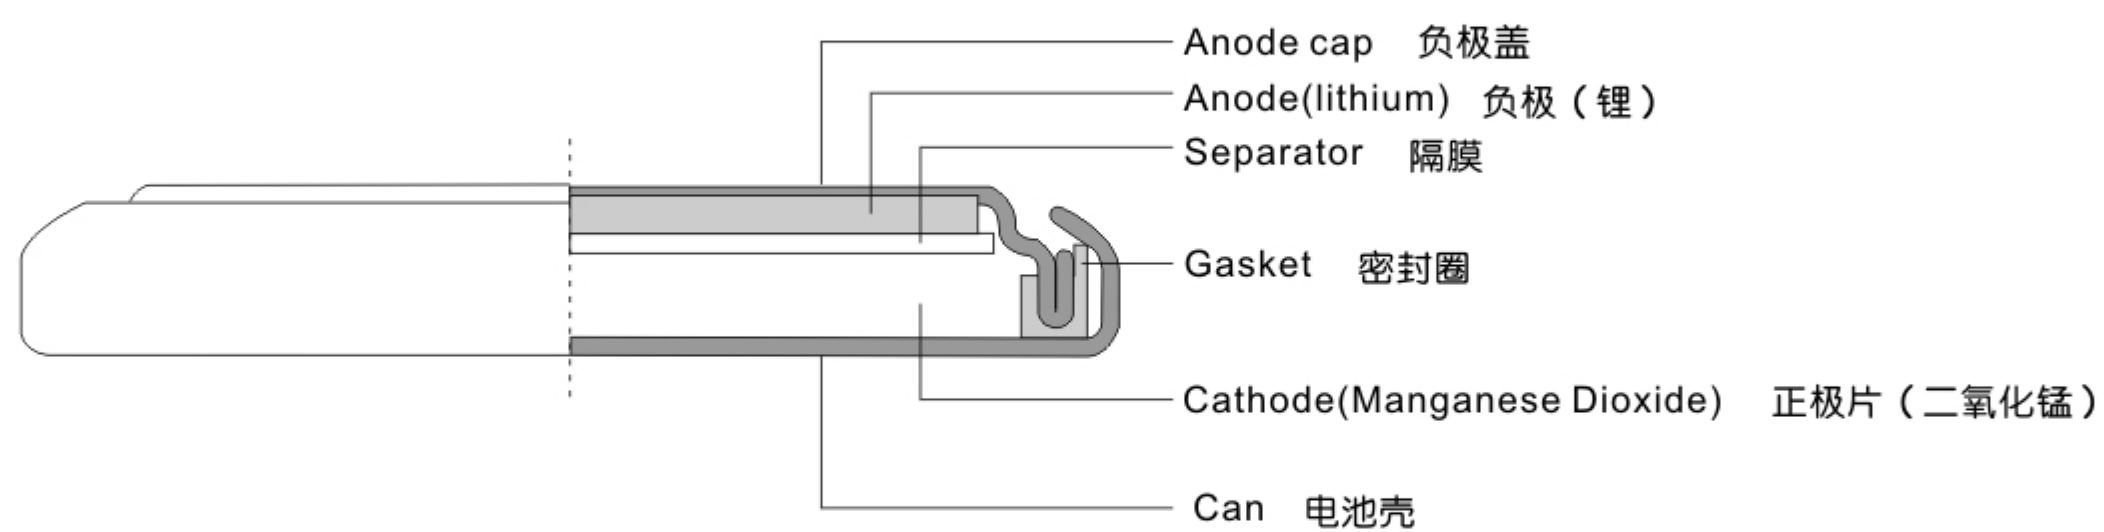

Model	Nominal Voltage (V)	Nominal Capacity (mAh)	Standard Discharge Load(KΩ)	End Voltage (V)	Test Temperature (°C)	Max. Diameter (mm)	Max. Height (mm)	Reference Weight (g)
CR1216	3	32	62	2.0V	23°C ± 3°C	12.5	1.6	0.7
CR1220	3	40	62	2.0V	23°C ± 3°C	12.5	2.0	0.8
CR1225	3	55	30	2.0V	23°C ± 3°C	12.5	2.5	0.9
CR1616	3	55	30	2.0V	23°C ± 3°C	16.0	1.6	1.1
CR1620	3	75	47	2.0V	23°C ± 3°C	16.0	2.0	1.3
CR1632	3	130	47	2.0V	23°C ± 3°C	16.0	3.2	1.8
CR2016	3	90	30	2.0V	23°C ± 3°C	20.0	1.6	1.7
CR2025	3	150	15	2.0V	23°C ± 3°C	20.0	2.5	2.7
CR2032	3	220	15	2.0V	23°C ± 3°C	20.0	3.2	3.2
CR2320	3	155	15	2.0V	23°C ± 3°C	23.5	2.0	3.0
CR2325	3	195	15	2.0V	23°C ± 3°C	23.0	2.5	3.5
CR2330	3	260	15	2.0V	23°C ± 3°C	23.0	3.0	4.0
CR2430	3	280	7.5	2.0V	23°C ± 3°C	24.5	3.0	4.5
CR2450	3	550	7.5	2.0V	23°C ± 3°C	24.5	5.0	7.2
CR3032	3	600	7.5	2.0V	23°C ± 3°C	30.0	3.2	7.0