


REVISION RECORD				
REV	ECN	DESCRIPTION	DFT	DATE

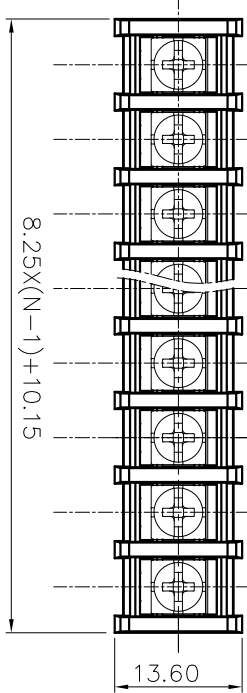

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 20A

2.Torque value : M3 , 4.43lb.in

3.Wire range : 22~12AWG

NOTES2:

1.Dimension shall be interpreted per

ASME Y14.5-2009

2.Pitch : 8.25mm, Poles : N=02~24P




3.Withstanding voltage : AC1600V/1Min

4.Operating temperature: -40°C~+105°C


5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		—	∩	□
Over	TO	Over	TO	Over	TO	Over
6	10	30	60	100	150	0.1/0
TO	TO	TO	TO	TO	TO	≤
6	10	24	30	60	100	150
±0.15±0.20±0.30±0.30±0.50±0.70±1.00±1.30		±0.30±0.50±0.70±1.00±1.30		±1.30		±2°

6.RoHS Compliance

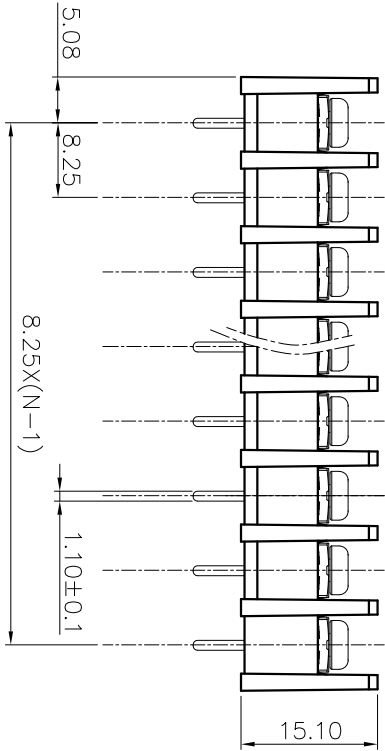

DG35S-B - XXP - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color) :1.(Grey)
(RoHS)
00A-(Standard)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

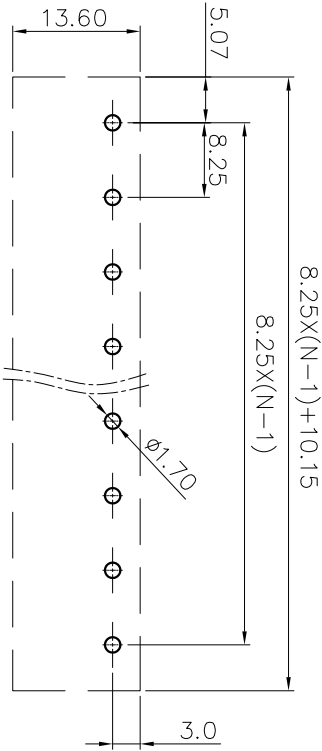

PCB LAYOUT

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DFT:	/
THIRD ANGLE PROJECTION	THIRD ANGLE PROJECTION
NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO.,LTD 宁波高松电子有限公司
TITLE:	DG35S-B-XXP-1Y-00A(H)
DRAWING NO.:	CUSTOMER DRAWING
REV	DO
1/1	1/1
SCALE	1:1