


Lithium sub-battery Q3282, ER18505H / W50, XH-2P, R2B1

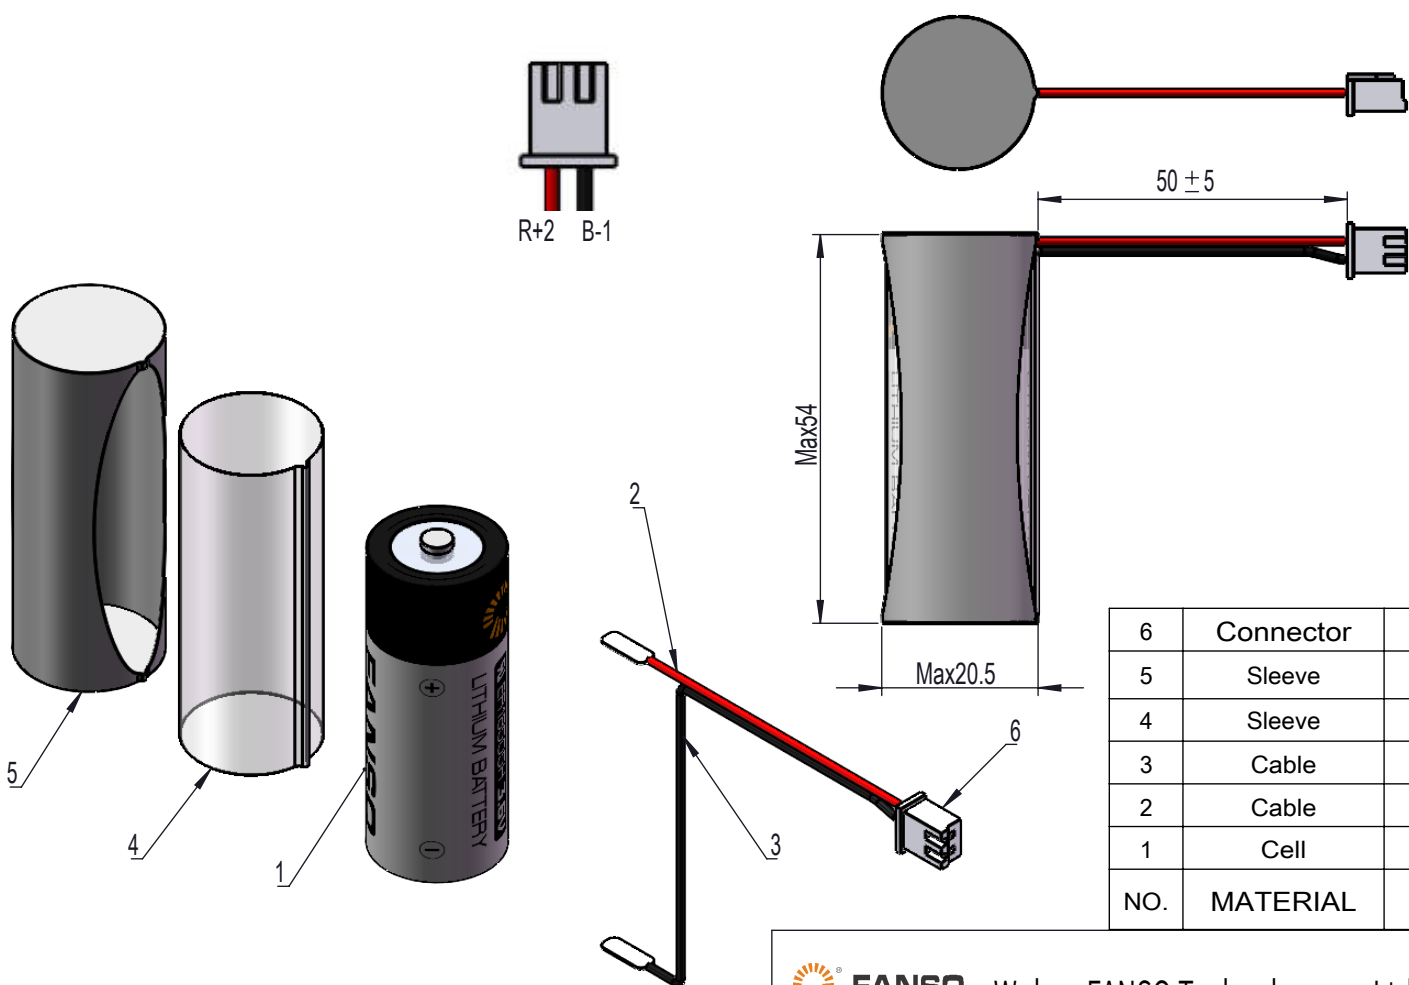

Undeclared tolerance		sign	date	Description of shanges	to bear
Basic dimensions	Tolerance range				
0.0-0.5	±0.05				
5.0-10.0	±0.08				
> 10.0	±0.13				


客户回签 Customer signature	
公司名称 Company name	
批准人 Approved by	
签字 (盖章) 日期 Signature date	

Printing: 14.4Wh 4Ah YYMMDD

6	Connector	XH-2P	1	
5	Sleeve	Gray PVC	1	
4	Sleeve	Transparent PVC	1	
3	Cable	UL1007-24# Black	1	
2	Cable	UL1007-24# Red	1	
1	Cell	ER18505H	1	
NO.	MATERIAL	SPECIFICATION	QTY	MARK

Technical requirements

- 1. Open circuit voltage≥3.64V,load voltage 165Ω≥3.20V.
- 2. The battery shall be free of leakage,damage and dirt.

 FANSO Wuhan FANSO Technology co.,Ltd Confidential information of FANSO, no spreading without permission!				Machine	Q3282			The part name		finished product		
				drawing number				Material number				
				Material				version	A0		View orientation	
design		technique	Kang Chang zhou	Stage markers	F	C	Z	D	S			
drawing	Zhu Xue ping	quality	Yang Kai						√			
audit	Zhu Zhi gang	approval	Liu Peng	date						unit	mm	
standard	Zhu Zhi gang	date	2024/5/9	The first one-one in total				Weight	Proportion		size	A4