



LL4148

Switching Diode

REVERSE VOLTAGE 75 Volts
FORWARD CURRENT 0.15 Amperes


Features

- Silicon epitaxial planar diode
- High speed switching diode
- 500mW power dissipation

Mechanical Data

- Cases: Min-MELF glass case
- Polarity: Color band denotes cathode
- Weight: Approx. 0.05 grams

MINI MELF(LL-34)

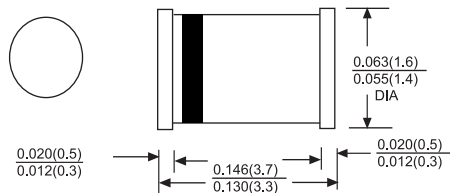

Inch(mm)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Maximum Ratings

Type Number		LL4148	Units
DC Block Voltage	V_R	75	V
Non-Peak Reverse Voltage	V_{RM}	100	V
Average Forward Rectified Current Half Wave Rectification with Resist load	I_o	150	mA
Forward Surge Current at $t < 1s$ and $T_j < 25^\circ C$	I_{FSM}	500	mA
Power Classification at T_j	P_{tot}	500 ⁽¹⁾	mW
Junction Temperature	T_J	175	°C
Storage Temperature Range	T_{STG}	-65 to +175	°C

NOTE:(1)Valid provided that

Electrical Characteristics

		Min	Typ	Max	Units
Forward Voltage at $I_F=10mA$	V_F	—	—	1	
Leakage Current at $V_R=20V$ at $V_R=75V$ at $V_R=20V, T_j=150^\circ C$	I_R I_R I_R	— — —	— — —	25 5 50	nA uA uA
Capacitance at $V_F=V_R=0V$	C_j	—	—	4	pF
Voltage Rise when Switching ON tested with 50mA pulse tp 0.1us Rise Time<30ns $I_p=5$ to 100Hz	V_{tt}	—	—	2.5	V
Reverse Recovery Time from $I_F=10mA$ $V_R=V, R_L=100\Omega$ at $I_R=1mA$	t_{rr}	—	—	4	ns
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	—	—	350	K/W
Rectification Efficiency at 100MHz, $V_{er}<2V$	η_V	0.45	—	—	—

NOTE: (1)Valid provided that electrodes are kept at ambient temperature.



FIG.4-RECTIFICATION EFFICIENCY
MEASUREMENT CIRCUIT

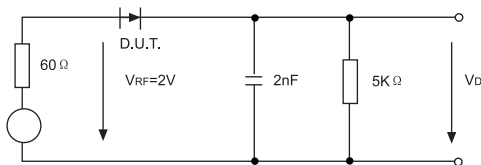


FIG.5- RELATIVE CAPACITANCE
VERSUS VOLTAGE

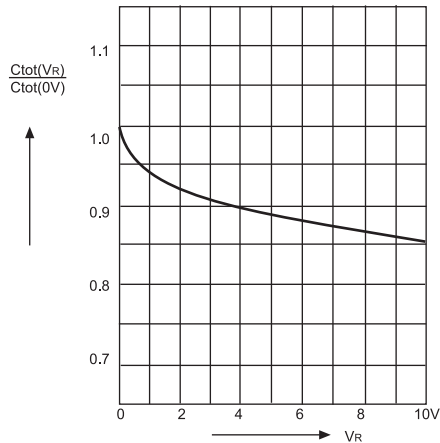


FIG.6-LEAKAGE CURRENT VERSUS
JUNCTION TEMPERATURE

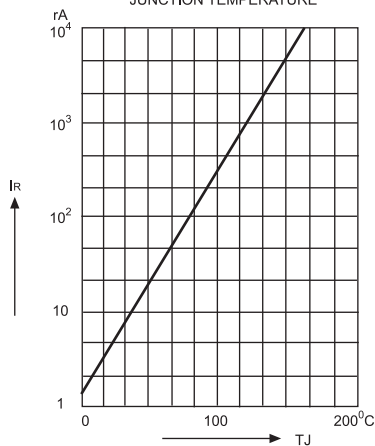


FIG.7-DYNAMIC FORWARD RESISTANCE
VERSUS FORWARD CURRENT

