



RoHS



## FEATURES

- Universal 90 - 264VAC or 127 - 370VDC input voltage
- Compact size 5" x 3"
- Operating ambient temperature range: -40°C to +70°C
- Built-in active PFC function
- Output short circuit, over-current, over-voltage protection, over-temperature protection
- 320W with air cooling, 550W with 25CFM
- 5VDC standby output, 12VDC fan supply
- PG signal and remote sensing function
- Medical approved, suitable for BF application
- The base plate with conformal coating
- Operating altitude up to 5000m

LOF550-20Bxx series is one of Mornsun's AC-DC miniaturize open frame power supply and suitable for all kinds of BF type (be accessible to patients) medical system equipment. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN/UL62368, GB4943, IEC/EN60335, IEC/EN61558, IEC/EN/ES60601-1 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home, etc.

## Selection Guide

Certification	Part No.*	Cooling method	Output Power *	Nominal Output Voltage and Current(Vo/Io)	Output Voltage Adjustable Range ADJ (V)	Efficiency at 230VAC (%) Typ. *	Capacitive Load (μF) Max.
UL/EN	LOF550-20B12	Air cooling	320.4	12V/26.7A	11.4 -12.6	91	6000
		25CFM	499.2	12V/41.6A			
	LOF550-20B15	Air cooling	319.5	15V/21.3A	14.25 -15.75	92	6000
		25CFM	499.5	15V/33.3A			
--	LOF550-20B18	Air cooling	320.4	18V/17.8A	17.1-19.9	92.5	6000
		25CFM	500.4	18V/27.8A			
	LOF550-20B19	Air cooling	319.2	19V/16.8A			
		25CFM	499.7	19V/26.3A			
UL/EN	LOF550-20B24	Air cooling	321.6	24V/13.4A	22.8 -25.2	93	6000
		25CFM	549.6	24V/22.9A			
	LOF550-20B27	Air cooling	321.3	27V/11.9A	25.65 - 28.35	93.5	4000
		25CFM	550.8	27V/20.4A			
	LOF550-20B36	Air cooling	320.4	36V/8.9A	34.2 - 37.8	94	3000
		25CFM	550.8	36V/15.3A			
	LOF550-20B48	Air cooling	321.6	48V/6.7A	45.6 - 50.4	94	2000
		25CFM	550	48V/11.46A			
--	LOF550-20B54	Air cooling	310.5	54V/5.75A	51.3 - 56.7	94	1500
		25CFM	550.8	54V/10.2A			

Notes: 1.\*Under any conditions, the total power of the product should not exceed the rated power. When the output voltage is increased, the total output power cannot exceed the rated output power, when the output voltage is decreased, the output current cannot exceed the rated output current;  
 2.\*When measuring the full load efficiency, the fan should be connected to an external power supply. Fan loss is not included in the input power;  
 3.\*LOF Products with shell is also available, named LOF550-20Bxx-C/CF.

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	90	--	264	VAC
	DC input	127	--	370	VDC
Input Frequency		47	--	63	Hz

Input Current	115VAC	--	--	6.5	A	
	230VAC	--	--	3.0		
Inrush Current	115VAC	Cold start	--	50		--
	230VAC		--	80		--
Power Factor	115VAC	Full load	0.98	--	--	
	230VAC		0.95	--	--	
Leakage Current	264VAC	Contact leakage current	<0.1mA			
		Earth leakage current	<0.5mA			
Hot Plug			Unavailable			

### Output Specifications\*

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy*	Full load	12V/15V/18V/19V/24V/27V	--	±2	--	%
		36V/48V/54V	--	±1	--	
Line Regulation	Rated load	--	±0.5	--		
Load Regulation	0%-100% load	--	±1	--		
Ripple & Noise*	20MHz bandwidth	--	--	200	mV	
Temperature Coefficient		--	±0.03	--	%/°C	
Minimum Load		0	--	--	%	
Hold-up Time	115VAC input	10	--	--	ms	
	230VAC input	10	--	--		
Stand-by Power Consumption	Room temperature, 230VAC input, (PS_ON Low potential)	--	--	0.5	W	
Short Circuit Protection	Recovery time <5s after the short circuit disappear	Hiccup, continuous, self-recover				
Over-current Protection		≥105%Io, Hiccup, self-recover				
Over-voltage Protection	12V	≤15.6VDC	Output voltage turn off, re-power on for recover			
	15V	≤19.5VDC				
	18V	≤23.4VDC				
	19V					
	24V	≤31.2VDC				
	27V	≤35.1VDC				
	36V	≤46.8VDC				
	48V	≤60.0VDC				
54V	≤63.0VDC					
Over-temperature Protection		Protection when over-temperature, recover automatically after the temperature drops.				
Fan Power*	12V/15V/18V/19V/24V/27V/36V/48V/54V	Offer output power of 12V/0.5A				
PS_ON Input Signal*	Power on	PS_ON High	2	--	5	V
	Power off	PS_ON Low	0	--	0.5	
PG Signal*	Power on	The PG signal goes high with 10ms to 500ms delay after power set up	10	--	500	ms
	Power off/Power fail	The TTL signal goes low at least 1ms before output below 90% of rated value	1	--	--	
	High level	High	2	--	6	V
	Low level	Low	0	--	0.6	
Remote Sense*	When RS+ and RS- are connected to the system, with function of remote voltage compensation, if not needed, left RS+ and RS- open					
5V Standby	5Vsb: The load capacity is 0.6A without fan, the load capacity is 1A with fan 25CFM; tolerance 2%, ripple: 120mVp-p(max.)					

Note: 1.\*Output Voltage Accuracy: including setting error, line regulation, load regulation;  
 2.\*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor (Low ESR) and 0.1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information;  
 3.\*For fan power connection method, please refer to 5, 6 in the external dimension drawing;  
 4.\*For PS\_ON, 5V standby connection method, please refer to CN6 in the external dimension drawing;  
 5.\*For PG standby connection method, please refer to CN2 in the external dimension drawing;  
 6.\*For all the above test items, please refer to our company standard "AC-DC Black Box Test Specification" for specific test specifications and methods;

### General Specifications

Item		Operating Conditions		Min.	Typ.	Max.	Unit	
Isolation Test	Input-output	Electric Strength Test for 1min. Leakage current <5mA		400	--	--	VAC	
	Input - ⊕			2000	--	--		
	output - ⊕			1500	--	--		
Insulation Resistance	Input-output	Environment temperature: 25 ± 5℃, Relative humidity: <95%RH, non-condensing Testing voltage: 500VDC		100	--	--	MΩ	
	Input - ⊕			100	--	--		
	output - ⊕			100	--	--		
Isolation level	Input-output			2 x MOPP				
	Input - ⊕			1 x MOPP				
	output - ⊕			1 x MOPP				
Operating Temperature				-40	--	+70	℃	
Storage Temperature				-40	--	+85		
Storage Humidity		Non-condensing		10	--	95	%RH	
Operating Humidity				20	--	90		
Switching Frequency				--	--	--	KHz	
Power Derating	25CFM	Operating Temperature derating		-40℃ to +50℃	0	--	--	% / ℃
				+50℃ to +70℃	2.5	--	--	
	Air cooling	230V/ 320W		+45℃ to +50℃	4.0	--	--	W / ℃
				+50℃ to +60℃	6.0	--	--	
		115V/310W		+30℃ to +40℃	1.0	--	--	
				+40℃ to +50℃	6.0	--	--	
				+50℃ to +60℃	4.0	--	--	
	Input voltage derating	90VAC - 115VAC			1.0	--	--	% / VAC
		115VAC - 264VAC			0	--	--	
127VDC - 160VDC			0.76	--	--	% / VDC		
160VDC - 370VDC			0	--	--			
Safety Standard	12V/15V/24V/27V/36V/48V		ES60601-1 Safety Approval & EN62368-1, EN60601-1(Report) Design refer to IEC/UL/EN62368-1, GB4943.1, EN60335-1, ES/EN60601-1					
	18V/19V/54V		Design refer to EN/UL/IEC 62368-1, GB4943.1, EN/ES60601-1, EN60335-1					
Safety Class				CLASS I				
MTBF		MIL-HDBK-217F@25℃		>200,000 h				

### Mechanical Specifications

Case Material	Open Frame
Dimension	127×76.2×40.5mm
Weight	490g (Typ.)
Cooling Method*	310W/320W Air cooling; 500W/550W 25CFM




Notes: \*Please refer to the product characteristic curve for cooling method and power derating.

Electromagnetic Compatibility (EMC)\*



Emissions	CE	EN55032(CISPR32)/EN55011(CISPR11) CLASS B		
	RE	EN55032(CISPR32)/EN55011(CISPR11) CLASS B		
	Harmonic Current	IEC/EN61000-3-2	CLASS A and CLASS D	
	Flicker	IEC/EN61000-3-3		
Immunity	ESD	IEC/EN61000-4-2	Contact ±8KV/Air ±15KV	Perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	Perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV	Perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line ±2KV, line to ground ±4KV	Perf. Criteria A
	CS	IEC/EN61000-4-6	10Vr.m.s	Perf. Criteria A
	DIP IEC/EN61000-4-11 0%, 70%	DIP IEC/EN61000-4-11	0%, 70%	Perf. Criteria B

Notes: 1.\*The power supply is considered a component as part of system, all EMC items are tested on a metal plate (L x W x H, 360mm x 360mm x 1mm). Power supply should be combined with final equipment for EMC confirmation.

Product Characteristic Curve

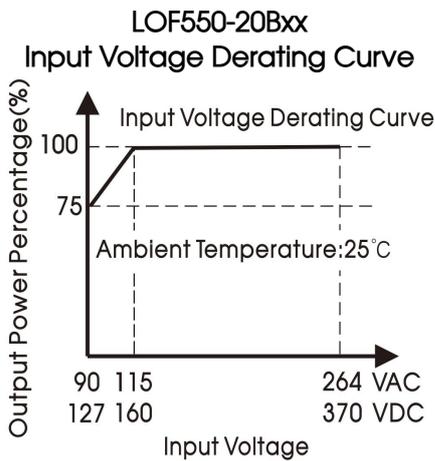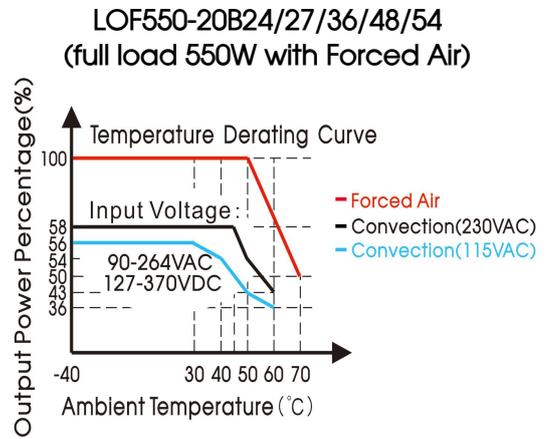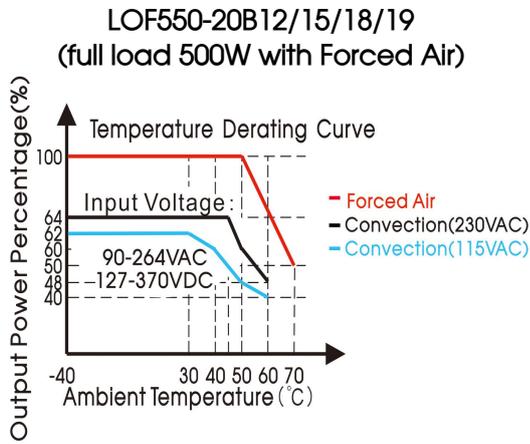


Note: With an AC input voltage between 90 - 115VAC and a DC input between 127 - 160VDC the output power must be derated as per the temperature derating curves

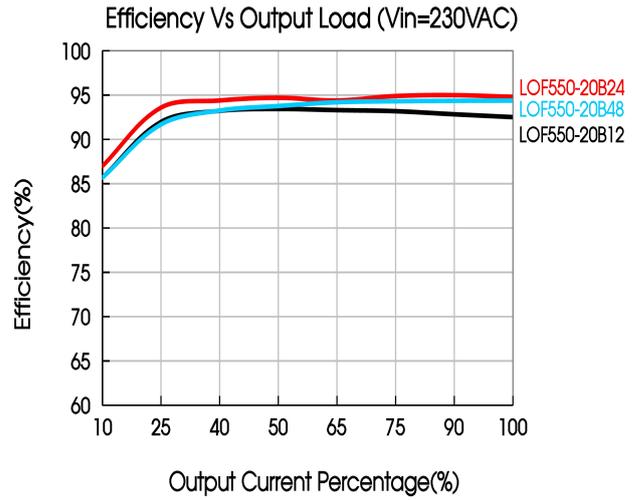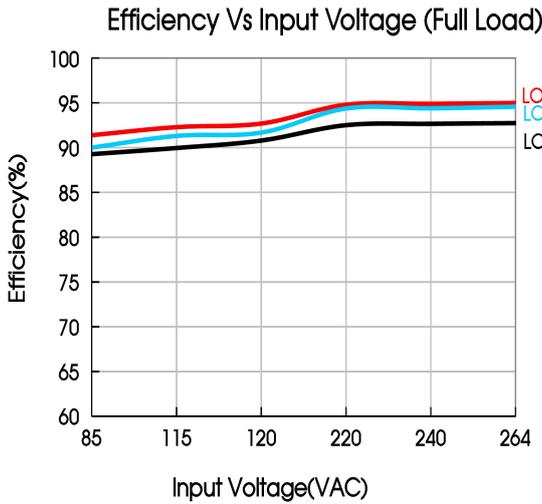

### Dimensions and Recommended Layout

#### LOF550-20Bxx Series

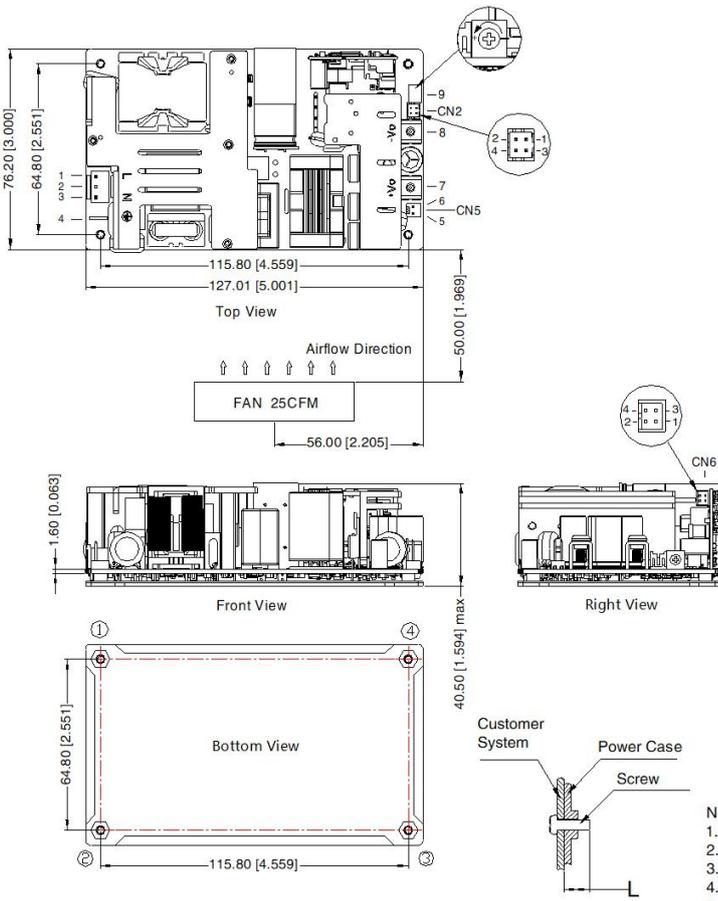


Pin	Mark	Customer Connector
1	AC(L)	Housing: JST VHR or equivalent
2	NC	Contact: JST SVH-21T-P1.1 or equivalent
3	AC(N)	
4	$\oplus$	Contact: JST SPS-21T-250
5	FAN+	CN5: Fan power output port
6	FAN-	Housing: TKP 2502 or equivalent
7	+Vo	Contact: TKP 8811 or equivalent
8	-Vo	
9	ADJ	Output adjustable resistor

Pin	Mark	Customer Connector
1	+5V	Housing: JST PHD-2*2Y or equivalent
2	GND	Contact: JST PHD-TE or equivalent
3	PS-ON	
4	GND	

Pin	Mark	Customer Connector
1	RS-	Housing: JST PHD-2*2Y or equivalent
2	RS+	Contact: JST PHD-TE or equivalent
3	GND	
4	PG	

- Note:
- Unit: mm[inch]
  - Pin7, 8 connector tightening torque: M4, 1.2N · m(max)
  - General tolerances:  $\pm 1.00[\pm 0.039]$
  - The layout of the device is for reference only, please refer to the actual product
  - It is recommended 10mm distance between the PCB and other components for safety purpose
  - Class I system ①②④ positions must be connected to the earth ( $\oplus$ )

Position	Screw Spec.	L(Recommend)	Torque(max)
① - ④	M3	2.5mm	0.4N.m

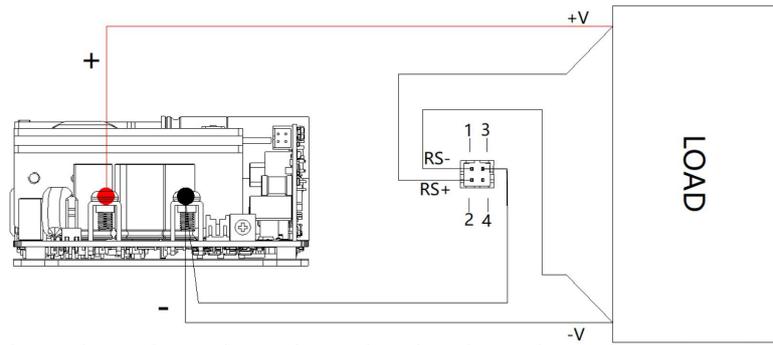

Remote sensing function wiring diagram

- Note:
1. RS - and RS + cannot be shorted or reversed, otherwise the power module will be damaged;
  2. The remote compensation function can compensate the voltage drop on the output cable, which includes the sum of the cable drop connected to the output positive terminal and the output negative terminal;
  3. If you need to use remote compensation function, the signal pin needs to be connected with the load and with a twisted pair.

- Note:
1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220181;
  2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
  3. All index testing methods in this datasheet are based on our company corporate standards;
  4. In order to improve the efficiency, there will be audible noise generated when work at light load, but it does not affect product performance and reliability;
  5. We can provide product customization service, please contact our technicians directly for specific information;
  6. Products are related to laws and regulations: see "Features" and "EMC";
  7. The out case needs to be connected to PE ( $\oplus$ ) of system when the terminal equipment in operating;
  8. CAUTION: Double pole, neutral fusing. Disconnect mains before servicing. / "ATTENTION: Double pôle/fusible sur le neutre. Débrancher l'alimentation avant l'entretien;
  9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
  10. The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn) [www.mornsun-power.com](http://www.mornsun-power.com)