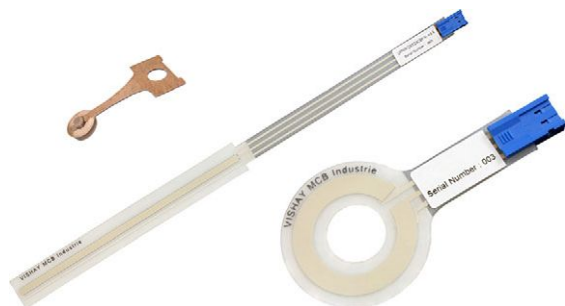


Displacement Sensor, Ultraflat Industrial Potentiometer Membrane



FEATURES

- Sealed
- Infinite resolution
- High integration capacity
- Durability
- Rectilinear: UIPMA type
- Rotational: UIPMC type
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


RoHS
COMPLIANT

DESIGN SUPPORT TOOLS

[click logo to get started](#)
3D
Models
Available

QUICK REFERENCE DATA

| | |
|------------------|--|
| Sensor type | LINEAR or ROTATIONAL, conductive plastic |
| Output type | Output by connector |
| Market appliance | Industrial |
| Dimensions | 4 mm (thickness max.) |

ELECTRICAL SPECIFICATIONS

| PARAMETER | UIPMA | UIPMC |
|-------------------------------------|--|---------------------|
| Total resistance (R_n) | 4.7 k Ω | 10 k Ω |
| Tolerance on R_n | $\pm 30 \%$ | |
| Dissipation | ≤ 0.1 W/cm of travel ⁽¹⁾ | ≤ 1 W to 70 °C |
| Theoretical electrical travel (TET) | 20 mm to 250 mm ⁽¹⁾ | 312° |
| Tolerance on TET | ± 1 mm | $\pm 3^\circ$ |
| Useful electrical travel (UET) | TET - 2 mm | 306° |
| Electrical continuity travel (ECT) | TET + 4 mm | 325° |
| Linearity | $\pm 2 \%$ | $\pm 5 \%$ |
| Temperature coefficient | -300 ppm/°C ± 300 ppm/°C | |
| Collector / track current (I_c) | ≤ 1 mA | |
| Recommended current I_c | ≤ 100 μ A | |
| Recommended load impedance | $\geq 100 R_n$ | |
| Output smoothness | $< 0.1 \%$ (NFC 93 255) | |

Note

⁽¹⁾ See "Specific UIPMA Characteristics" table

MECHANICAL SPECIFICATIONS

| PARAMETER | UIPMA | UIPMC |
|-------------------------------|--|------------------------------|
| Design | Flexible insulating films | Flexible insulating films |
| Mechanical travel | Electrical continuity travel | Electrical continuity travel |
| Backlash | < 0.1 mm | $< 0.3^\circ$ |
| Mounting | With double-sided adhesive on flat, clean, and dry support | |
| Speed displacement | ≤ 1.5 m/s | |
| Drive | Force ≥ 0.3 N | Torque ≥ 1 N cm |
| Protection class (NFC 20 010) | IP66 (electrical connection and plug excluded) | |
| Maximum alignment fault | ± 1 mm | - |

PERFORMANCE

| PARAMETER | UIPMA | UIPMC |
|-----------------------------|--|-------|
| Life | > 3 M cycles (depending on chosen wiper) | |
| Operating temperature range | -10 °C to $+50$ °C | |
| Storage temperature range | -40 °C to $+50$ °C | |
| Support | Flat, clean, and dry | |

Note

- Nothing stated herein shall be construed as a guarantee of quality or durability

SAP PART NUMBERING GUIDELINES - UIPM

| MODEL | TYPE | UIPMA: THEORETICAL ELECTRICAL TRAVEL (mm) UIPMC: EXTERNAL DIAMETER (mm) | TYPE | VALUE | LINEARITY | LEADS | PACKAGING |
|-------|----------------|--|----------------|-----------|---------------|---------------|-----------|
| UIPM | A = linear | 050 100 (on request) 150 200 (on request) 250 | I = industrial | 472 = 4K7 | X = $\pm 2\%$ | C = connector | B = bulk |
| UIPM | C = rotational | 030 | I = industrial | 103 = 10K | J = $\pm 5\%$ | C = connector | B = bulk |

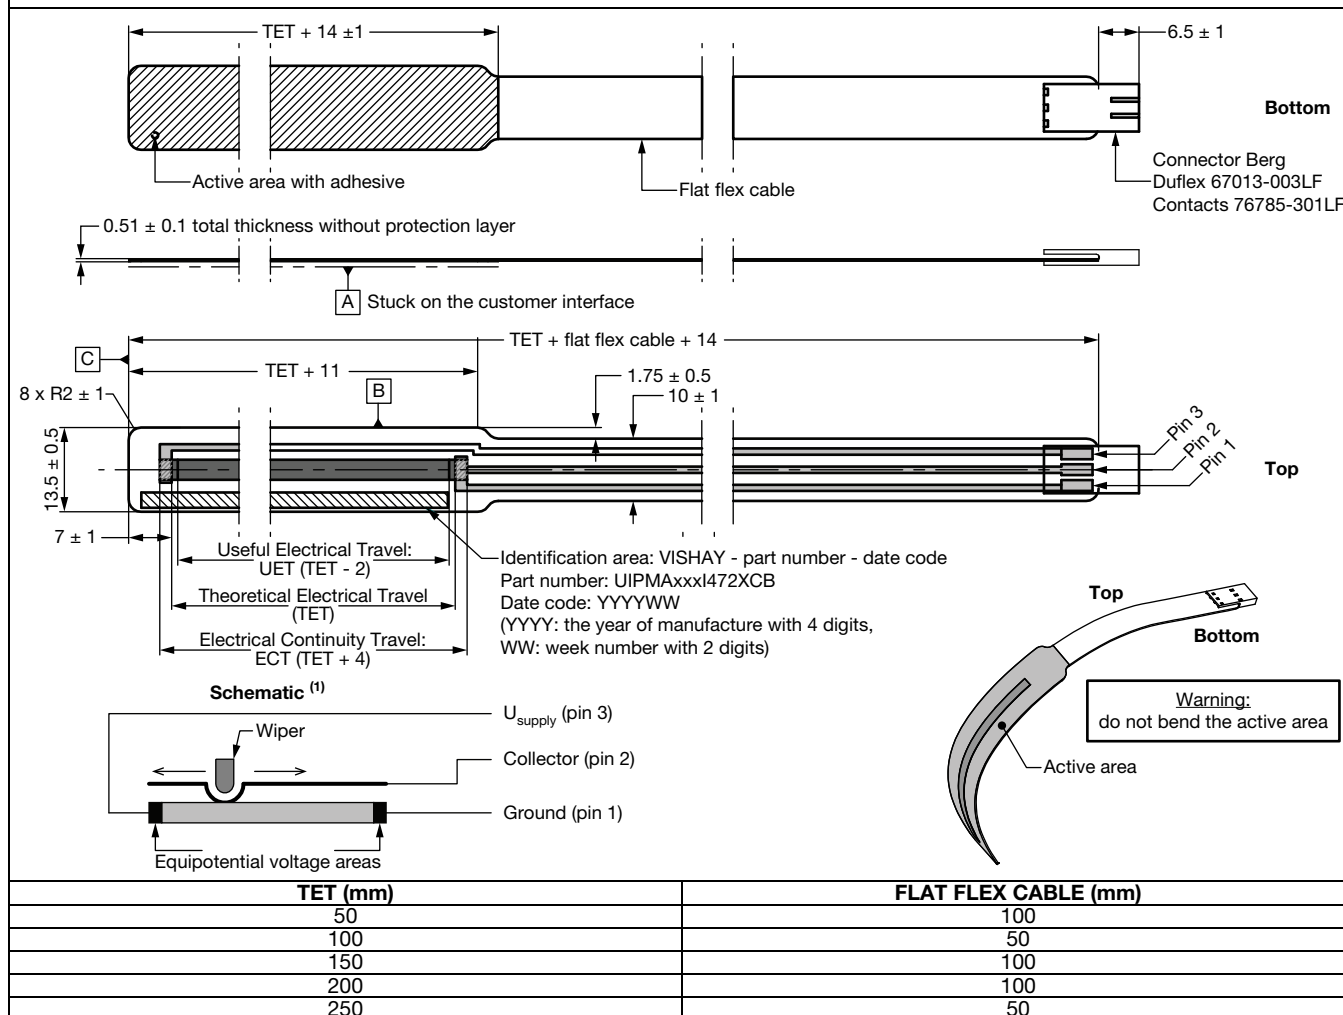
ACCESSORY WIPER

| | |
|--------------|--------------------|
| Wiper type A | ACCSUIPMWIPERKB434 |
| Wiper type B | ACCSUFPMWIPERKB422 |
| Wiper type D | ACCSUIPMWIPERKB435 |

CONNECTIONS


Connector Berg Duflex 67.013.003, contacts 76.785.301

The connector of UIPMA / UIPMC is intended for use with Berg terminal ref. 76785-YXX and Berg headers ref. 76384-YXX or 76382-YXX

DIMENSIONS in millimeters
UIPMA

Notes

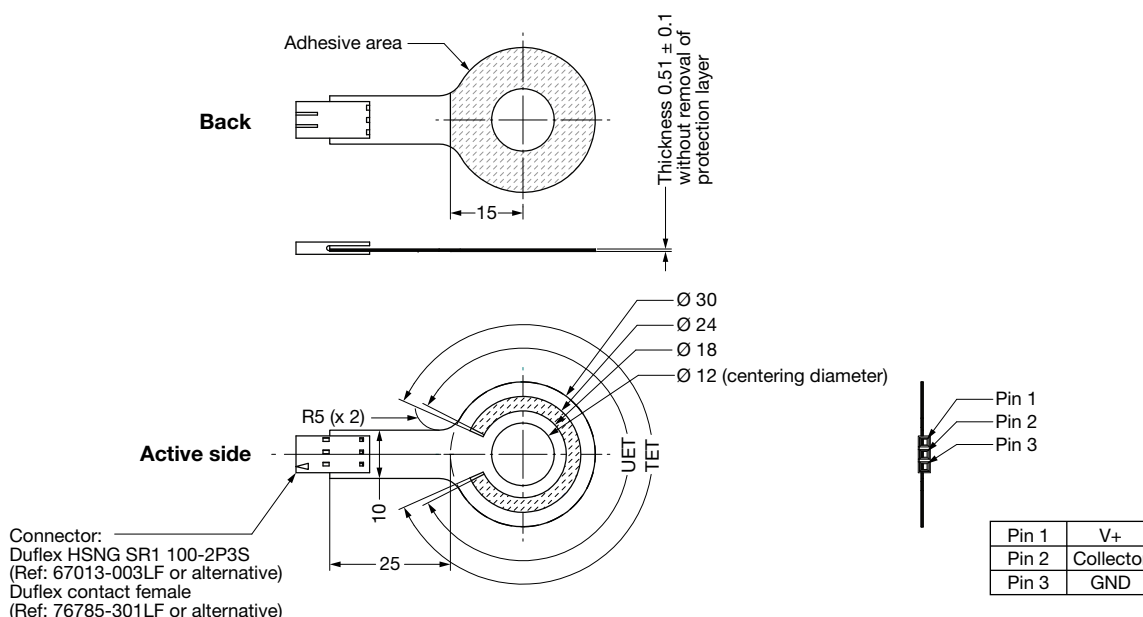
- Tolerancing according to ISO 8015
- General tolerances according to ISO 2768 - mK
- (1) Ground and U_{supply} can be swapped to change the slope sign

MOUNTING REQUIREMENTS FOR UIPMA

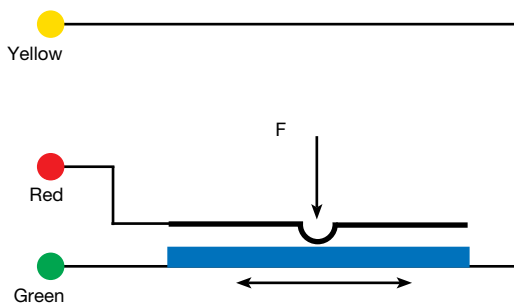
1. The shape of the customer interface over the active area shall be:  0.05
2. The roughness of the customer interface over the active area shall be: \sqrt{Ra} 1.6
3. Before sticking the sensor, the interface surface shall be free of all traces of dirt, grease, foreign objects, and burrs.
4. The bending of the flat flex cable shall be: \varnothing 3 mm min.

DIMENSIONS in millimeters

UIPMC



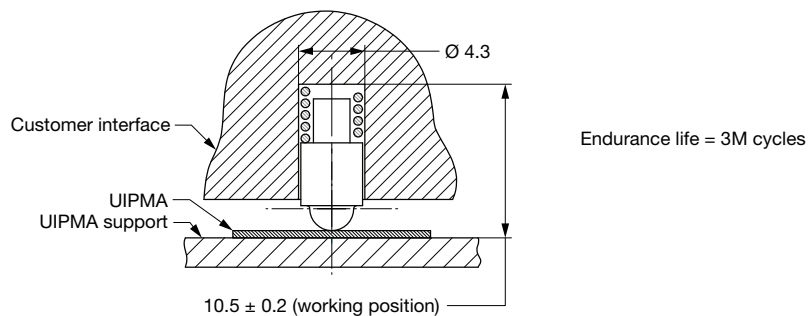
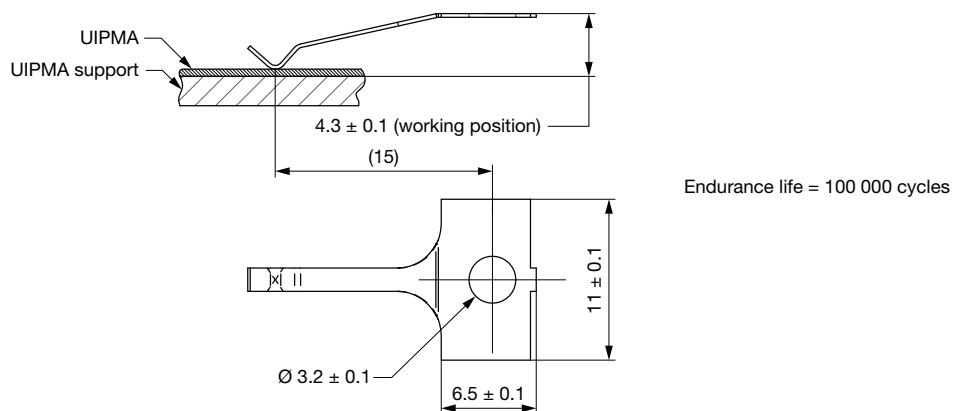
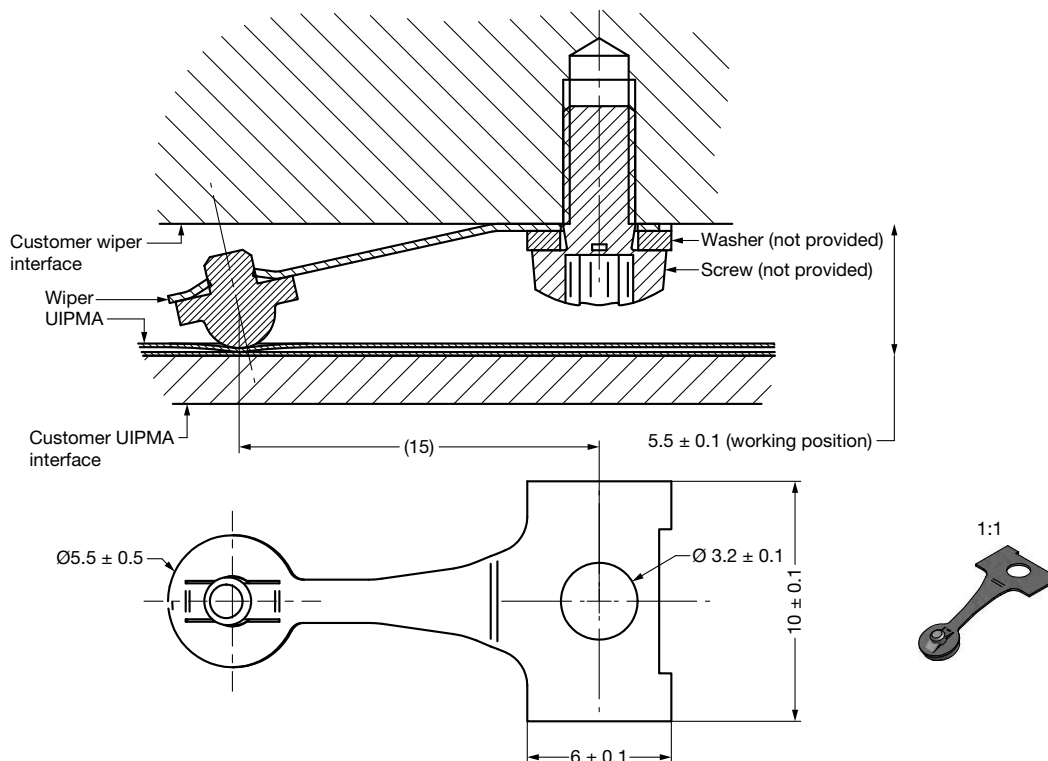
ELECTRICAL DIAGRAM



The voltage varies according to the position of the presser on the deformable membrane.

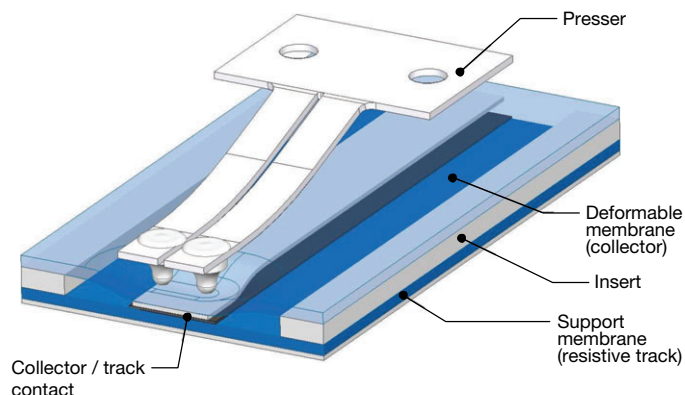
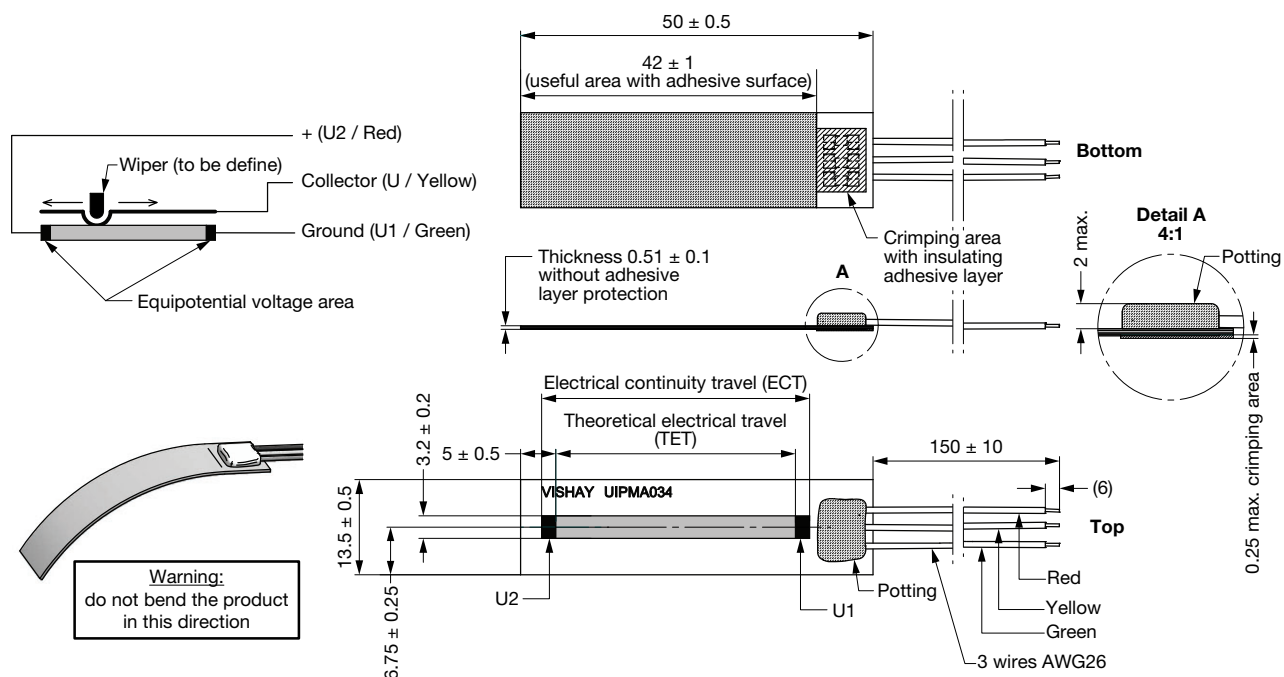
SPECIFIC VERSIONS (on request)

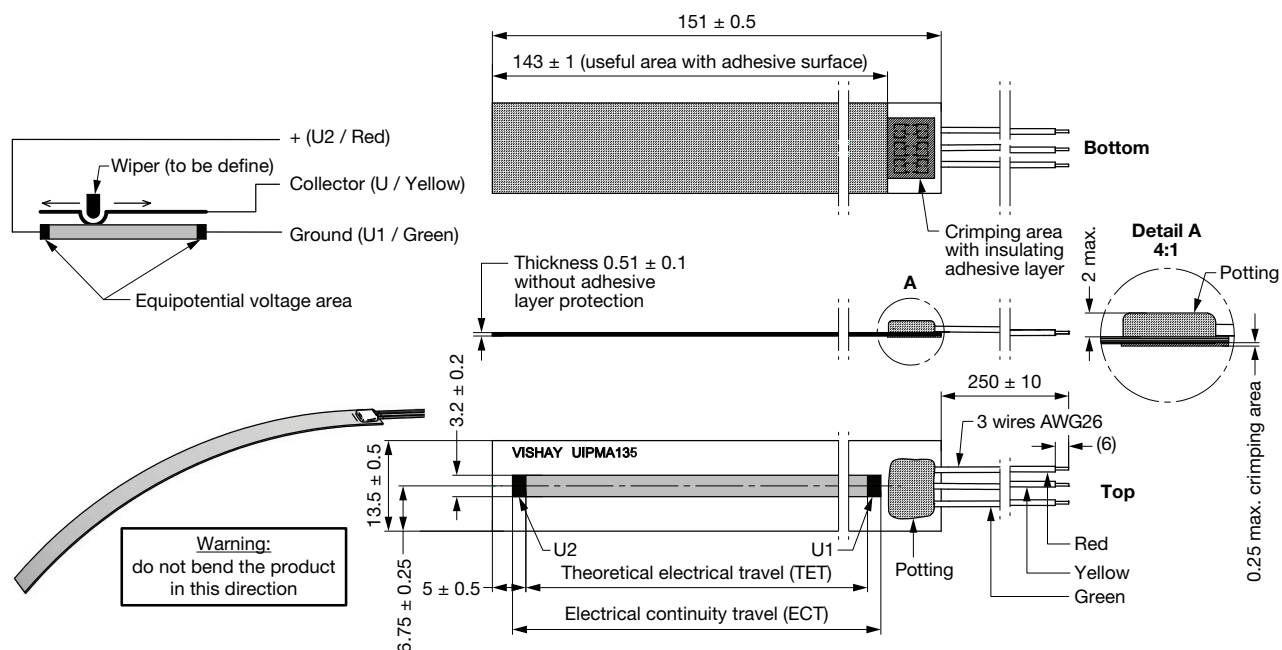
- Other electrical or mechanical characteristics
- Other bases
- Integration in equipment
- Other versions: outdoor design, ...
- Integration in equipment (flat flex cable, contacts, wires, ...)

PRESSERS
Wiper Type A

Wiper Type B

Wiper Type D


SPECIFIC UIPMA CHARACTERISTICS

| THEORETICAL ELECTRICAL TRAVEL (TET) (mm) | DISSIPATION AT +40 °C (W) | ELECTRICAL CONTINUITY TRAVEL (ECT) (mm) | FILM LENGTH (mm) |
|--|---------------------------|---|------------------|
| 50 | ≤ 0.5 | 54 | 75 |
| 100 | ≤ 1.0 | 104 | 125 |
| 150 | ≤ 1.5 | 154 | 175 |
| 200 | ≤ 2.0 | 204 | 225 |
| 250 | ≤ 2.5 | 254 | 275 |

OPERATING DESCRIPTION

ON REQUEST
UIPMA034 WITH WIRES OUTPUT


ON REQUEST
UIPMA135 WITH WIRES OUTPUT




Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.