

















Features


- 2.73"x1.53" compact size
- Medical safety approved (2 x MOPP) according to ANSI/AAMI ES60601-1 and IEC/EN60601-1
- Suitable for BF application with appropriate system consideration
- No load power consumption<0.075W
- · Extremely low leakage current
- Wide operating temp. range -40 ~ +85°C
- · Protections: Short circuit / Overload / Over voltage
- No minimum load required
- 3 years warranty

Applications

- · Portable medical device
- · Mobile clinical workstation
- Medical computer monitor
- Medical examination instrument

Description

MPM-30 is a 30W high density and small size (69.5x39x24mm) AC/DC module type medical power supply series offered in pin type. It features the operation for $80\sim264$ VAC, a low no load power consumption less than 0.075W, a high efficiency up to 91%, Class II (no FG) double insulation, outstanding dissipation and high lifespan thanks to the interior potting, 5G anti-vibration, high EMC performance, 4KVAC isolation, etc. The design observes IEC/EN60601-1 and ANSI/AAMI ES60601-1 version three with 2xMOPP level and ultra-low leakage current (<80 μ A). It is very suitable for BF (patient contact) type medical device or relevant equipment. In addition to PCB mounting style,MPM-30 series also offers the screw terminal style model (ST).

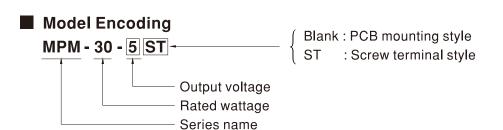




MODEL		MPM-30-3.3□	MPM-30-5□	MPM-30-12□	MPM-30-15□	MPM-30-24□	MPM-30-48□	
	DC VOLTAGE	3.3V	5V	12V	15V	24V	48V	
ОИТРИТ	RATED CURRENT	6A	6A	2.5A	2A	1.3A	0.63A	
	CURRENT RANGE Note.2	0 ~ 6A	0 ~ 6A	0 ~ 2.5A	0 ~ 2A	0 ~ 1.3A	0 ~ 0.63A	
	PEAK CURRENT	7.8A	6.9A	2.9A	2.3A	1.5A	0.73A	
	RATED POWER	19.8W	30W	30W	30W	31.2W	30.2W	
	PEAK LOAD(10sec.) Note.3	25.7W	34.5W	34,8W	34.5W	36W	35W	
	RIPPLE & NOISE (max.) Note.4	80mVp-p	80mVp-p	120mVp-p	120mVp-p	200mVp-p	200mVp-p	
	VOLTAGE TOLERANCE Note.5		±2,0%	±2.0%	±2,0%	±2,0%	±2,0%	
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0,5%	±0.5%	
	LOAD REGULATION	±1.0%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	
	SETUP, RISE TIME	500ms, 30ms/230VAC 500ms, 30ms/115VAC at full load						
	HOLD UP TIME (Typ.)	40ms/230VAC 12ms/115VAC at full load						
	VOLTAGE RANGE Note,6							
INPUT	FREQUENCY RANGE	00 ~ 204 VAC 47 ~ 63Hz						
		82.5%	86.5%	90%	89%	90%	91%	
	EFFICIENCY (Typ.)			90%	0970	90%	9170	
	AC CURRENT (Typ.) INRUSH CURRENT (Typ.)	0.75A/115VAC						
		COLD START 25A/115VAC 45A/230VAC						
	LEAKAGE CURRENT (max.) Note.7							
PROTECTION	OVERLOAD	115% ~ 165% rated output power Protection type: Hiccup mode, recovers automatically after fault condition is removed						
		71					50.4.004	
	OVER VOLTAGE	3.5 ~ 4.5V	5.3 ~ 6.8V	12.6 ~ 16.2V	15.8 ~ 20.3V	25.2 ~ 32.4V	50.4 ~ 64V	
		Protection type: Shut down o/p voltage, re-power on to recover						
	WORKING TEMP.	-40 ~ +85°C (Refer to "Derating Curve")						
ENVIRONMENT	WORKING HUMIDITY	20 ~ 90% RH non-condensing						
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing						
	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)						
	SOLDERING TEMPERATURE							
	VIBRATION	Blank:10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes						
	VIDICATION	ST:10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes						
	LEAD TEMPERATURE	$260\pm5^{\circ}$ C,5s (max.)						
	OPERATING ALTITUDE Note.8	PCB mounting: 50	00 meters	Screw terminal st	yle: 3000 meters			
	SAFETY STANDARDS	IEC60601-1, EN60601-1, EAC TP TC 004, UL ANSI/AAMI ES60601-1(3.1 version), CAN/CSA-C22 3 rd Edition approved; Design						
	ISOLATION LEVEL	refer to EN60335-1 Primary-Secondary: 2xMOPP						
	WITHSTAND VOLTAGE	I/P-O/P:4KVAC						
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH						
	IOOLATION REGISTANCE	Parameter	1137 300 V D C 7 23 C 7	Standard		Test Level / Note		
	EMC EMISSION	Conducted		EN55011 (CISPR	11)	Class B	•	
		Radiated						
		Harmonic Curren	N /					
		Voltage Flicker EN61000-3-3 EN60601-1-2						
AFETY &		EINDODO - -Z				Took Lovel / Note		
MC				Chandond		Test Level / Note		
МС		Parameter		Standard		1 14 45104	1 14 0107	
MC				Standard EN61000-4-2		·	•	
MC		Parameter	pility			Level 3, 10V/m(8	0MHz~2.7GHz)	
МС		Parameter ESD RF field suscepti	pility	EN61000-4-2 EN61000-4-3		Level 3, 10V/m(8 Table 9, 9~28V/m	0MHz~2.7GHz)	
МС	EMC IMMUNITY	Parameter ESD RF field suscepti EFT bursts	•	EN61000-4-2 EN61000-4-3 EN61000-4-4		Level 3, 10V/m(8 Table 9, 9~28V/m Level 3, 2KV	0MHz~2.7GHz) (385MHz~5.78GHz	
МС	EMC IMMUNITY	Parameter ESD RF field suscepti EFT bursts Surge susceptibi	lity	EN61000-4-2 EN61000-4-3 EN61000-4-4 EN61000-4-5		Level 3, 10V/m(8 Table 9, 9~28V/m Level 3, 2KV Level 3, 1KV/Line	0MHz~2.7GHz) (385MHz~5.78GHz	
MC	EMC IMMUNITY	Parameter ESD RF field suscepti EFT bursts Surge susceptibi Conducted susce	lity	EN61000-4-2 EN61000-4-3 EN61000-4-4 EN61000-4-5 EN61000-4-6		Level 3, 10V/m(8 Table 9, 9~28V/m Level 3, 2KV Level 3, 1KV/Line Level 3, 10V	0MHz~2.7GHz) (385MHz~5.78GHz	
SAFETY & EMC Note 9)	EMC IMMUNITY	Parameter ESD RF field suscepti EFT bursts Surge susceptibi	lity	EN61000-4-2 EN61000-4-3 EN61000-4-4 EN61000-4-5		Level 3, 10V/m(8 Table 9, 9~28V/m Level 3, 2KV Level 3, 1KV/Line Level 3, 10V Level 4, 30A/m	0MHz~2.7GHz) (385MHz~5.78GHz -Line	
MC	EMC IMMUNITY	Parameter ESD RF field suscepti EFT bursts Surge susceptibi Conducted susce	lity eptibility munity	EN61000-4-2 EN61000-4-3 EN61000-4-4 EN61000-4-5 EN61000-4-6		Level 3, 10V/m(8 Table 9, 9~28V/m Level 3, 2KV Level 3, 1KV/Line Level 3, 10V Level 4, 30A/m 100% dip 1 period	0MHz~2.7GHz) (385MHz~5,78GHz -Line ds, 30% dip 25 period	
мс		Parameter ESD RF field suscepti EFT bursts Surge susceptibi Conducted susce Magnetic field im Voltage dip, inter	lity eptibility munity ruption	EN61000-4-2 EN61000-4-3 EN61000-4-4 EN61000-4-5 EN61000-4-6 EN61000-4-8 EN61000-4-11		Level 3, 10V/m(8 Table 9, 9~28V/m Level 3, 2KV Level 3, 1KV/Line Level 3, 10V Level 4, 30A/m	0MHz~2.7GHz) (385MHz~5.78GHz -Line ds, 30% dip 25 perio	
MC Note 9)	мтвғ	Parameter ESD RF field suscepti EFT bursts Surge susceptibi Conducted susce Magnetic field im Voltage dip, inter	iity eptibility munity ruption IIL-HDBK-217F (25°0	EN61000-4-2 EN61000-4-3 EN61000-4-4 EN61000-4-5 EN61000-4-6 EN61000-4-8 EN61000-4-11	h Screw terminal style	Level 3, 10V/m(8 Table 9, 9-28V/m Level 3, 2KV Level 3, 1KV/Line Level 3, 10V Level 4, 30A/m 100% dip 1 period 100% interruption	(385MHz~5,78GHz -Line ds, 30% dip 25 periods	
МС		Parameter ESD RF field suscepti EFT bursts Surge susceptibi Conducted susce Magnetic field im Voltage dip, inter 779Khrs min. M	iity eptibility munity ruption IIL-HDBK-217F (25°0	EN61000-4-2 EN61000-4-3 EN61000-4-4 EN61000-4-5 EN61000-4-6 EN61000-4-8 EN61000-4-11 C)) or 2.73"*1.53"*0.94" incl		Level 3, 10V/m(8 Table 9, 9~28V/m Level 3, 2KV Level 3, 1KV/Line Level 3, 10V Level 4, 30A/m 100% dip 1 period	0MHz~2.7GHz) (385MHz~5.78GH: -Line ds, 30% dip 25 periods d) or 3.58"*1.55"*1.12	

NOTE

- 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
- 2. No minimum load required.
- 3. 33% Duty cycle maximum within every 30 seconds. Average output power should not exceed the rated power.
- 4. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ f & 47 μ f parallel capacitor.
- 5. Tolerance : includes set up tolerance, line regulation and load regulation.
- 6. Derating may be needed under low input voltages. Please check the derating curve for more details.
- 7. Touch current was measured from primary input to DC output.
- 8. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft)
- 9. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)



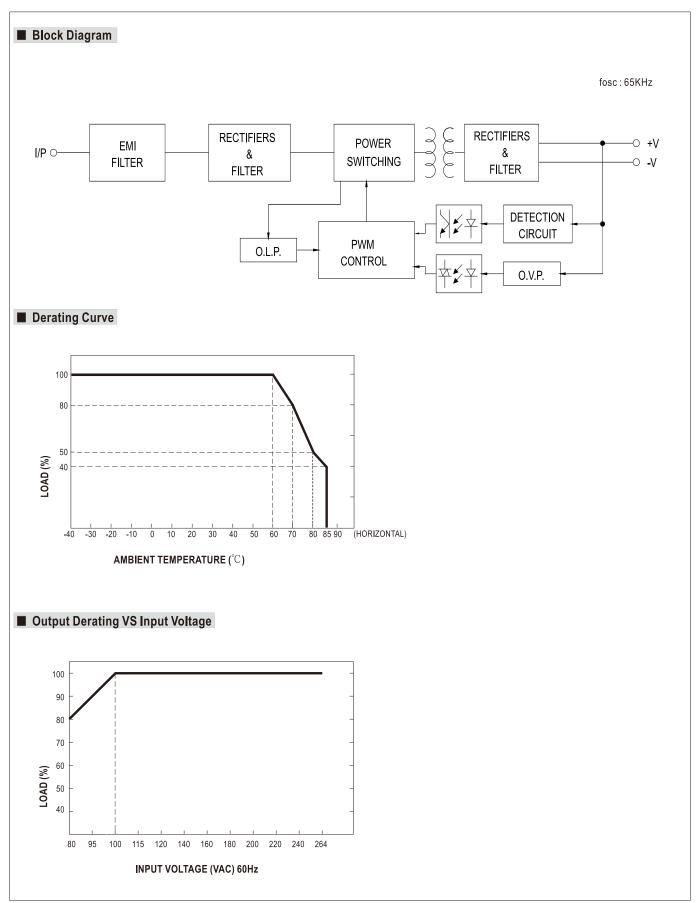





■ Mechanical Specification

• MPM-30 (PCB mounting style)


Case No. Unit:mm

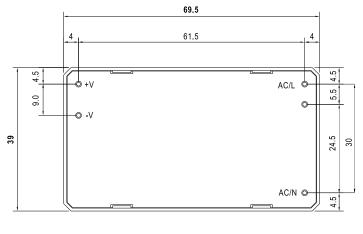




BOTTOM VIEW SIDE VIEW

• MPM-30-ST (Screw terminal style)

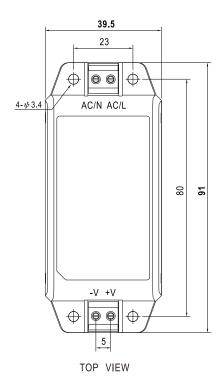



SIDE VIEW

■ Installation Manual

Please refer to : http://www.meanwell.com/manual.html