















Features

- Constant Current mode output
- Wide input range 90~305VAC (Class I)
- · Built-in active PFC function
- · Class 2 power unit
- No load power consumption < 0.5W
- IP67 rating for indoor or outdoor installations
- 3 in 1 dimming function (Isolation design)
- Life time>50,000 hours and 5 years warranty

Applications

- Street lighting
- Architectural lighting
- Low bay lighting
- · Floodlight lighting
- · Industrial Lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.


■ GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

XLG-20 series is a AC/DC LED driver featuring the constant current mode output. XLG-20 operates from 90~305VAC. Thanks to the high efficiency up to 89%, The entire series is able to operate between -40 °C ~+80 °C wide case temperature range with air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. XLG-20 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.XLG-20 series comply with the latest version of IEC61347/GB7000.1 -2015 and UL8750 international safety regulations. The output and dimming circuit are also completely in accordance with the new regulations with isolation to ensure the safety of both user and luminaire system during installation.

Model Encoding

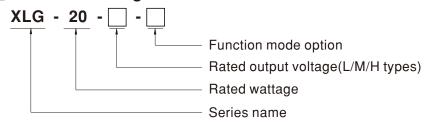

| Type | IP Level | Function | Note |
|-------|----------|--|----------|
| Blank | IP67 | lo fixed. | In Stock |
| В | IP67 | Io fixed with 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance) | In Stock |

21W Constant Current Mode LED Driver


SPECIFICATION

| MODEL | | XLG-20-L- | XLG-20-M- | XLG-20-H- 🗌 | | | |
|-----------------|--|--|---|---|--|--|--|
| | RATED CURRENT | 350mA | 500mA | 700mA | | | |
| OUTPUT | CONSTANT CURRENT REGION | 32.4 ~ 54V | 25.2 ~ 42V | 18 ~ 30V | | | |
| | RATED POWER | 18.9W | 21W | 21W | | | |
| | OPEN CIRCUIT VOLTAGE (max.) | 60V | 50V | 40V | | | |
| | CURRENT TOLERANCE | ±8.0% | | | | | |
| | OUTPUT CURRENT RIPPLE Note.13 | | | | | | |
| | SETUP, RISE TIME Note.2 | | | | | | |
| | LINE REGULATION | < ±3% | | | | | |
| | LINE REGULATION | 90~305VAC | | | | | |
| INPUT | VOLTAGE RANGE Note.3 | (Please refer to "STATIC CHARACTERISTIC" section) | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | |
| | POWER FACTOR | PF≥0.97/115VAC, PF≥0.95/230VAC, PF≥0.91/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) | | | | | |
| | TOTAL HARMONIC DISTORTION | THD< 20%(@load≧50%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section) | | | | | |
| | EFFICIENCY (Typ.) | 89% | 88.5% | 88% | | | |
| | AC CURRENT | 0.3A / 115VAC | С | | | | |
| | INRUSH CURRENT(Typ.) | COLD START 5A(twidth=350µs measured at 50% Ipeak) at 230VAC; Per NEMA 410 | | | | | |
| | MAX. No. of PSUs on 16A CIRCUIT BREAKER | 42 units (circuit breaker of type B) / 42 units (circuit breaker of type C) at 230VAC | | | | | |
| | LEAKAGE CURRENT | <0.75mA / 277VAC | | | | | |
| | NO LOAD POWER CONSUMPTION | No load power consumption <0.5W | | | | | |
| PROTECTION | SHORT CIRCUIT | Hiccup mode, recovers automatically after fault condition is removed. | | | | | |
| | WORKING TEMP. | Tcase=-40 ~ +80°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section) | | | | | |
| ENVIRONMENT | MAX. CASE TEMP. | Tcase=+80°C | SAD V3 TEINI EIVATONE Section) | | | | |
| | WORKING HUMIDITY | 20 ~ 95% RH non-condensing | | | | | |
| | STORAGE TEMP. | 2-40 ~ +80°C | | | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0~60°C) | | | | | |
| | VIBRATION | 10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes | | | | | |
| | SAFETY STANDARDS | UL8750(type"HL"), CSA C22.2 No. 250.13-12; ENEC AS/NZS IEC BS EN/EN61347-1, AS/NZS BS EN/EN61347-2-13 independent, BS EN/EN62384; IP67; GB19510.1, GB19510.14, EAC TP TC 004 approved | | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:3.75KVAC I/P-FG:2.0KVAC O/P-FG:1.5KVAC | | | | | |
| | ISOLATION RESISTANCE | I/P-O/P. I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH | | | | | |
| | IOOLATION NEOIOTANOE | Parameter | Standard | Test Level/Note | | | |
| | | Conducted | BS EN/EN55015(CISPR15) ,GB/T17743 | | | | |
| | | Radiated | BS EN/EN55015(CISPR15) ,GB/T17743 | | | | |
| | EMC EMISSION | | B3 EN/EN33013(Cl3FK13), GB/117743 | | | | |
| | | Harmonic Current | DC EN/ENG1000 2 2 CD/T17625 1 | Class C. @load>50% | | | |
| SAFETY & | | Harmonic Current | BS EN/EN61000-3-2 ,GB/T17625.1 | Class C @load≥50% | | | |
| | | Voltage Flicker | BS EN/EN61000-3-2 ,GB/T17625.1 BS EN/EN61000-3-3 | Class C @load≥50% | | | |
| SAFETY & EMC | | Voltage Flicker BS EN/EN61547 | BS EN/EN61000-3-3 | | | | |
| | | Voltage Flicker BS EN/EN61547 Parameter | BS EN/EN61000-3-3 Standard | Test Level/Note | | | |
| | | Voltage Flicker BS EN/EN61547 Parameter ESD | BS EN/EN61000-3-3 Standard BS EN/EN61000-4-2 | Test Level/Note Level 3, 8KV air ; Level 2, 4KV contact | | | |
| | | Voltage Flicker BS EN/EN61547 Parameter ESD Radiated | BS EN/EN61000-3-3 Standard BS EN/EN61000-4-2 BS EN/EN61000-4-3 | Test Level/Note Level 3, 8KV air ; Level 2, 4KV contact Level 3 | | | |
| | EMC IMMUNITY | Voltage Flicker BS EN/EN61547 Parameter ESD Radiated EFT/Burst | BS EN/EN61000-3-3 Standard BS EN/EN61000-4-2 BS EN/EN61000-4-3 BS EN/EN61000-4-4 | Test Level/Note Level 3, 8KV air ; Level 2, 4KV contact Level 3 Level 3 | | | |
| | EMC IMMUNITY | Voltage Flicker BS EN/EN61547 Parameter ESD Radiated EFT/Burst Surge | BS EN/EN61000-3-3 Standard BS EN/EN61000-4-2 BS EN/EN61000-4-3 BS EN/EN61000-4-4 BS EN/EN61000-4-5 | Test Level/Note Level 3, 8KV air ; Level 2, 4KV contact Level 3 Level 3 2KV/Line-Line 4KV/Line-Earth | | | |
| | EMC IMMUNITY | Voltage Flicker BS EN/EN61547 Parameter ESD Radiated EFT/Burst Surge Conducted | BS EN/EN61000-3-3 Standard BS EN/EN61000-4-2 BS EN/EN61000-4-3 BS EN/EN61000-4-4 BS EN/EN61000-4-5 BS EN/EN61000-4-6 | Test Level/Note Level 3, 8KV air ; Level 2, 4KV contact Level 3 Level 3 2KV/Line-Line 4KV/Line-Earth Level 3 | | | |
| | EMC IMMUNITY | Voltage Flicker BS EN/EN61547 Parameter ESD Radiated EFT/Burst Surge | BS EN/EN61000-3-3 Standard BS EN/EN61000-4-2 BS EN/EN61000-4-3 BS EN/EN61000-4-4 BS EN/EN61000-4-5 | Test Level/Note Level 3, 8KV air ; Level 2, 4KV contact Level 3 Level 3 2KV/Line-Line 4KV/Line-Earth Level 3 Level 4 | | | |
| | | Voltage Flicker BS EN/EN61547 Parameter ESD Radiated EFT/Burst Surge Conducted | BS EN/EN61000-3-3 Standard BS EN/EN61000-4-2 BS EN/EN61000-4-3 BS EN/EN61000-4-4 BS EN/EN61000-4-5 BS EN/EN61000-4-6 | Test Level/Note Level 3, 8KV air ; Level 2, 4KV contact Level 3 Level 3 2KV/Line-Line 4KV/Line-Earth Level 3 | | | |
| | EMC IMMUNITY | Voltage Flicker BS EN/EN61547 Parameter ESD Radiated EFT/Burst Surge Conducted Magnetic Field Voltage Dips and Interruptions 5721.2K hrs min. Telcordia SR-332 (Bellcore) | BS EN/EN61000-3-3 Standard BS EN/EN61000-4-2 BS EN/EN61000-4-3 BS EN/EN61000-4-4 BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 | Test Level/Note Level 3, 8KV air ; Level 2, 4KV contact Level 3 Level 3 2KV/Line-Line 4KV/Line-Earth Level 3 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, | | | |
| SAFETY & EMC | | Voltage Flicker BS EN/EN61547 Parameter ESD Radiated EFT/Burst Surge Conducted Magnetic Field Voltage Dips and Interruptions 5721.2K hrs min. Telcordia SR-332 (Bellcore) 95*63*30mm (L*W*H) | BS EN/EN61000-3-3 Standard BS EN/EN61000-4-2 BS EN/EN61000-4-3 BS EN/EN61000-4-4 BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 | Test Level/Note Level 3, 8KV air ; Level 2, 4KV contact Level 3 Level 3 2KV/Line-Line 4KV/Line-Earth Level 3 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods | | | |

NOTE


- 1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25% of ambient temperature
- 2. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.

 3. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- 4. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 5. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (tc) point (or TMP, per DLC), is about 80°C or less.
- 6. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com
- 7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 8. Products sourced from the Americas regions may not have the CCC/PSE/BIS/KC logo. Please contact your MEAN WELL sales for more information.
- For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf
- $10. \ \, \text{Ripple \& noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 uf \& 47 uf parallel capacitor.}$
- 11. To fulfill requirements of the latest ErP regulation for lighting fixture, this LED driver can only be used behind a switch without permanently connected to the mains.
- 12. If you need the NOM (Mexico) certificate, Please contact MEAN WELL sales representative for details.
- 13. Output current ripple is mean sured at 230VAC input, full load and 25 $^{\circ}\mathrm{C}$ of ambient temperature.
- xim Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx

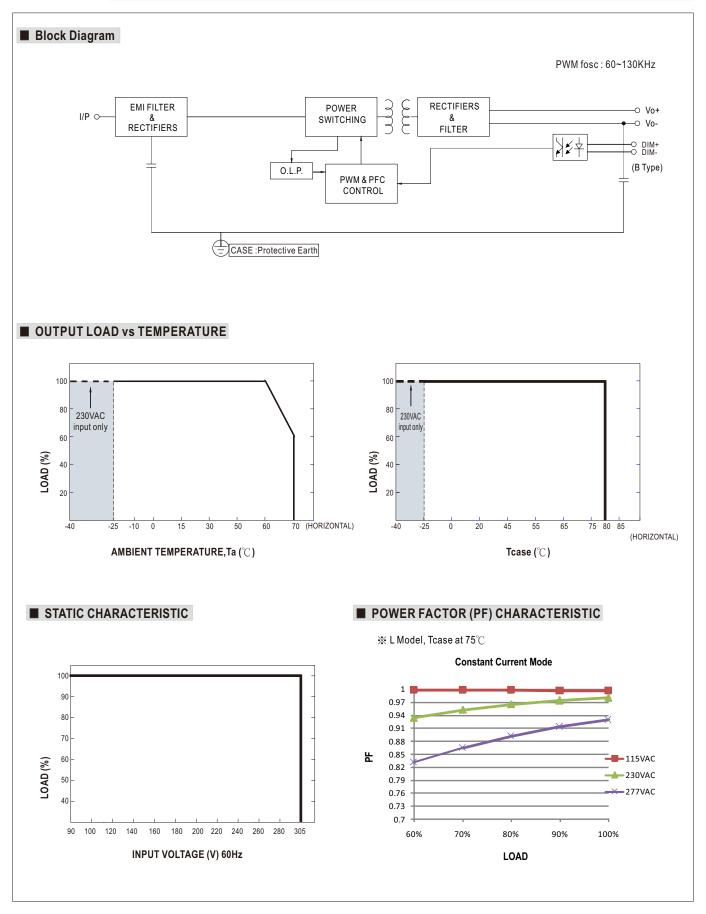

■ TOTAL HARMONIC DISTORTION (THD)


★ L Model, Tcase at 75°C

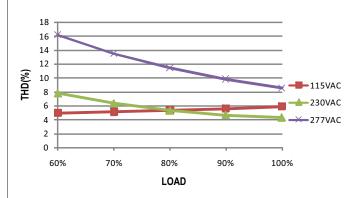


■ EFFICIENCY vs LOAD

 $\rm XLG\text{-}20$ series possess superior working efficiency that up to 89% can be reached in field applications.

★ L Model, Tcase at 75°C

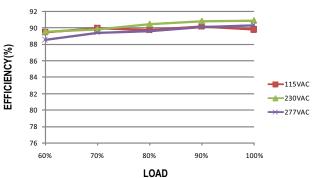


■ LIFE TIME

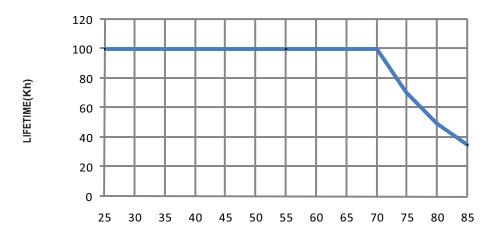


Tcase (℃)

■ DIMMING OPERATION

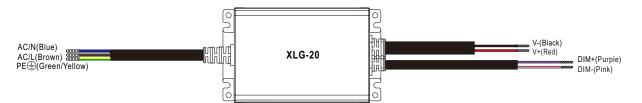


※ 3 in 1 dimming function (for B-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 103µA (typ.)

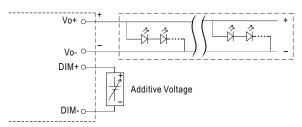


"DO NOT connect "DIM- to Vo-"

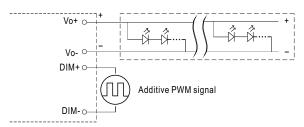



"DO NOT connect "DIM- to Vo-"


Applying additive resistance:

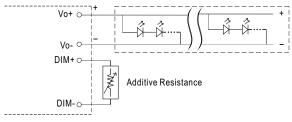

"DO NOT connect "DIM- to Vo-"







Note: 1. Min. dimming level is about 3% and the output current is not defined when 0% < Iout < 3%.



