





























Features

- Wide input range 100~305V AC(Class I)
- Full power output at 70~100% Constant power mode operation
- · Metal case with IP67, suitable for outdoor application
- Class 2 power unit(except for L type)
- Surge protection with 6KV/4KV
- 3 in 1 dimming function (Dim to off and Isolation design)
- India (EESL) version with Input Over Voltage Protection can survive input voltage stress of 440Vac for 48 hours
- Protection functions: OVP/SCP/OCP/OTP
- Life time >50,000 hrs. and 5 years warranty


Applications

- Skyscraper lighting
- Street lighting
- Floodlight Lighting
- · Stage lighting
- Fishing lighting
- · Horticulture lighting
- · Bay lighting
- DMX power supply
- Type HL for use in class I , Division 2

Description

XLG-75 series is a 75W LED AC/DC driver featuring the constant power mode.XLG-75 operates from 100~305VAC and offers models with different rated current ranging between 700mA and 5000mA. Thanks to the high efficiency up to 91%, with the fanless design, the entire series is able to operate for -40°C ~+90°C case temperature under free air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. Moreover the innovative environment-adaptive capability allows this series to reliably light on the LEDs for all kinds of application environments in almost any spots that may install LED luminaires in the world. XLG-75 series comply with the latest version of IEC61347/GB7000.1-2015 and UL8750 international safety regulations. The output and dimming circuit are also completely in accordance with the new regulations with isolation to ensure the safety of both user and luminaire system during installation.

Model Encoding

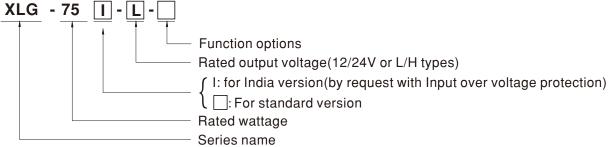

Type	Function	Note
Blank	lo and Vo fixed.(For harsh envirenment)	By request
Α	lo adjustable via built-in potentiometer	In Stock
АВ	Io adjustable via built-in potentiometer + 3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock

Note: 1.12V and 24V models without the AB type

2.India version needs MOQ for production, please consult MEANWELL for detail



75W Constant Voltage + Constant Current LED Driver XLG-75 series

SPECIFICATION

MODEL		XLG-75 □-12- □	XLG-75 □-24- □				
	DC VOLTAGE	12V	24V				
ОИТРИТ	CONSTANT CURRENT REGION Note.2	8.4~ 12V	16.8~ 24V				
	RATED CURRENT	5A	3.1A				
	RATED POWER	60W	74.4W				
	RIPPLE & NOISE (max.) Note.3	150mVp-p 240mVp-p					
	CURRENT ADJ RANGE	2.5A~5A	1.55A~3.1A				
	VOLTAGE TOLERANCE Note.4	±3.0%	±2.0%				
	LINE REGULATION	±0.5% ±0.5%					
	LOAD REGULATION	±2% ±1%					
	SETUP, RISE TIME Note.6	500ms, 100ms/230VAC, 1200ms, 100ms/115VAC					
	HOLD UP TIME (Typ.)	10ms/ 230VAC 10ms/ 115VAC					
INPUT	VOLTAGE RANGE Note.5	100 ~ 305VAC 142 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)					
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR	$PF \! \ge \! 0.97/115 VAC, PF \! \ge \! 0.95/230 VAC, PF \! \ge \! 0.92/277 VAC \\ @ full \ load$					
	TOTAL HARMONIC DISTORTION	THD<10%(@load≧50%/115VC,230VAC; @load≧75%/277VAC)					
	EFFICIENCY (Typ.)	89%	90%				
	AC CURRENT	1.0A / 115VAC 0.45A / 230VAC 0.38A/	/277VAC				
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=300µs measured	at 50% Ipeak) at 230VAC; Per NEMA 41	0			
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	9 units (circuit breaker of type B) / 14 units (circuit breaker of type C) at 230VAC					
	LEAKAGE CURRENT	<0.75mA / 277VAC					
	NO LOAD POWER CONSUMPTION	No load power consumption <0.5W(for standard version)					
	OVER CURRENT	95 ~ 108% Hiccup mode or Constant current limiting, recovers automatically after fault condition is removed					
	SHORT CIRCUIT	Hiccup mode or Constant current limiting, recovers automatically after fault condition is removed					
ROTECTION	OVER VOLTAGE	13 ~ 19V 26 ~ 36V Shut down output voltage, re-power on to recover					
	INPUT OVER VOLTAGE Note.7	320 ~ 370VAC (Shut down output voltage when the input voltage exceeds protection voltage, recovers automatically after fault condition is removed Can survive input voltage stress of 440Vac for 48 hours @ tc 75°C max					
	OVER TEMPERATURE	Shut down output voltage, re-power on to recover					
	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)					
	MAX. CASE TEMP.	Tcase=+90°C					
	WORKING HUMIDITY	20 ~ 95% RH non-condensing					
NVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +90°C, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 60°C)					
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72	2min. each along X, Y, Z axes				
	SAFETY STANDARDS Note.7	UL8750((type"HL"), UL879, CSA C22.2 No. 250.13-12;ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384; GB19510.1, GB19510.14; EAC TP TC 004;J61347-1(H29), J61347-2-13(H29), KC61347-1, KC61347-2-13, IS15885(Part2/Sec13) (for XLG-75) type only); OM-058-SCFI-2017(except for Blank type);IP67 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500	0VDC / 25°C / 70% RH				
		Parameter	Standard	Test Level/Note			
		Conducted	BS EN/EN55015(CISPR15),GB/T177	743			
	EMC EMISSION	Radiated	BS EN/EN55015(CISPR15), GB/T177	743			
		Harmonic Current	BS EN/EN61000-3-2 ,GB/T17625.1	Class C @load≥50%			
MC		Voltage Flicker	BS EN/EN61000-3-3				
AFETY &	EMC IMMUNITY	BS EN/EN61547					
		Parameter	Standard	Test Level/Note			
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact			
		Radiated	BS EN/EN61000-4-3	Level 3			
		EFT/Burst	BS EN/EN61000-4-4	Level 3			
		Surge	BS EN/EN61000-4-5	4KV/Line-Line 6KV/Line-Earth			
		Conducted	BS EN/EN61000-4-6	Level 3			
		Magnetic Field	BS EN/EN61000-4-8	Level 4			
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods >95% interruptions 250 periods			
	MTBF	1232.28K hrs min. Telcordia SR-332 (Bel	llcore); 376.3Khrs min. MIL-HDBK	<u> </u>			
OTHERS	MTBF DIMENSION	1232.28K hrs min. Telcordia SR-332 (Bel 140*63*32mm (L*W*H)	llcore); 376.3Khrs min. MIL-HDBk	<u> </u>			

- 2. Please refer to DRIVING METHODS OF LED MODULE.

 3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.

 4. Tolerance: includes set up tolerance, line regulation and load regulation.

 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.

 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.

 7. Input over voltage only for XLG-75! series, and I series without UL/CSA certificate.

 8. The driver is expected as a component that will be prograted in combination with final equipment. Since EMC performance will be affer.

- 8. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

 9. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 75°C or less.

 10. Please refer to the warranty statement on MEAN WELL's website at http://www.mean.nell.com

- 11. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).

 12. Products sourced from the Americas regions may not have the PSE/CCC/BIS/KC logo. Please contact your MEAN WELL sales for more information.
- 13. To fullfill requirements of the latest ErP regulation for lighting fixtures, this LED drivers can only be used behind a switch without permanently connected to the mains
- For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf
 If you need the NOM (Mexico) certificate, Please contact MEAN WELL sales representative for details.
- χ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx

File Name:XLG-75-SPEC 2021-11-26

File Name:XLG-75-SPEC 2021-11-26

SPECIFICATION


		XLG-75L	XLG-75				
	RATED CURRENT	700mA	1400mA				
ОИТРИТ	RATED POWER	74.9W	75.6W				
	CONSTANT CURRENT REGION	53 ~ 107V	27 ~ 56V				
	FULL POWER CURRENT RANGE	700~1050mA	1300~2100mA				
	OPEN CIRCUIT VOLTAGE (max.)	115V	60V				
	CURRENT ADJ. RANGE	350~1050mA	650~2100mA				
	CURRENT RIPPLE	3.0%(@rated current)					
	CURRENT TOLERANCE	±5%					
	SET UP TIME	500ms/230VAC, 1200ms/115VAC					
-	VOLTAGE BANGE	100 ~ 305VAC 142VDC ~ 431VDC					
	VOLTAGE RANGE Note.5	(Please refer to "STATIC CHARACTERISTIC" ang "DRIVING METHODS OF LED MODULE"section)					
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR (Typ.)	$PF{\geqq}0.97/115VAC, PF{\geqq}0.95/230VAC, PF{\geqq}0.92/277VACatfullload$					
	TOWERTACTOR (Typ.)	(Please refer to "Power Factor Characteristic" section)					
	TOTAL HARMONIC DISTORTION	THD< 10% (@ load≥50% at 115VAC/230VAC,@load≥75% at 277VAC)					
	TOTAL HARMONIC DISTORTION	Please refer to "TOTAL HARMONIC DISTORTION (THD)" section					
INPUT	EFFICIENCY (Typ.)	91% 90%					
	AC CURRENT (Typ.)	1A / 115VAC 0.45A / 230VAC 0.38	A / 277VAC				
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=300μs measured at 5	50% Ipeak) at 230VAC; Per NEMA 410				
	MAX. NO. of PSUs on 16A	9 unit/circuit breaker of type R) / 14 units/circ	ruit breaker of type C) at 230VAC				
	CIRCUIT BREAKER	3 unit(circuit breaker of type b) / 14 units(circ	9 unit(circuit breaker of type B) / 14 units(circuit breaker of type C) at 230VAC				
	LEAKAGE CURRENT	<0.75mA / 277VAC					
	STANDBY	Standby power consumption <0.5W for AB-Type(Dimming OFF)(for standard version)					
	POWER CONSUMPTION	Standby power consumption <0.5W for a	AB-Type(Diffilling OFF)(for standard	version)			
	OVER DOWER	110 ~ 150%					
	OVER POWER	Hiccup mode, recovers automatically after far	ult condition is removed				
ROTECTION	SHORT CIRCUIT	Hiccup mode or Constant current limiting, rec	covers automatically after fault condition is	removed			
KUIECIIUN	INDUT OVER VOLTACE, N. C.	320 ~ 370VAC (Shut down output voltage when the	e input voltage exceeds protection voltage, recov	vers automatically after fault condition is remo			
	INPUT OVER VOLTAGE Note.7	Can survive input voltage stress of 440Vac for 48 hours @ tc 75 ℃ max					
	OVER TEMPERATURE	Shut down output voltage, re-power on to rec	-				
	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)					
	MAX. CASE TEMP.	Tcase=+90°C					
NVIDONMENT	WORKING HUMIDITY	20 ~ 95% RH non-condensing					
NVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C , 10 ~ 95% RH non-condensing					
	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)					
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes					
	SAFETY STANDARDS Note.7	UL8750(type"HL"), CSA C22.2 No. 250.13-12; ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384; GB19510.1, GB19510.14; EAC TP TC 004;J61347-1(H29), J61347-2-13(H29), KC61347-1,KC61347-2-13,IS15885(Part2/Sec13) (for XLG-751 type only); NOM-058-SCFI-2017(except for Blank type);IP67 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P					
SAFETY &	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500\	VDC / 25°C / 70% RH				
MC		Parameter S	Standard	Test Level/Note			
		Conducted	BS EN/EN55015(CISPR15) ,GB/T17743				
	EMC EMISSION	Radiated	BS EN/EN55015(CISPR15), GB/T17743				
	EMC EMISSION	Harmonic Current E	BS EN/EN61000-3-2 ,GB/T17625.1	Class C @load≥50%			
			BS EN/EN61000-3-3				
		BS EN/EN61547					
		BS EN/EN61547 Parameter S	Standard	Test Level/Note			
		Parameter S	Standard 3S EN/EN61000-4-2	Test Level/Note Level 3. 8KV air : Level 2. 4KV contact			
		Parameter S ESD E	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact			
	FMC IMMUNITY	ParameterSESDERadiatedE	3S EN/EN61000-4-2 3S EN/EN61000-4-3	Level 3, 8KV air ; Level 2, 4KV contact Level 3			
	EMC IMMUNITY	Parameter S ESD E Radiated E EFT/Burst E	3S EN/EN61000-4-2 3S EN/EN61000-4-3 3S EN/EN61000-4-4	Level 3, 8KV air ; Level 2, 4KV contact Level 3 Level 3			
	EMC IMMUNITY	Parameter S ESD E Radiated E EFT/Burst E Surge E	3S EN/EN61000-4-2 3S EN/EN61000-4-3 3S EN/EN61000-4-4 3S EN/EN61000-4-5	Level 3, 8KV air ; Level 2, 4KV contact Level 3 Level 3 4KV/Line-Line 6KV/Line-Earth			
	EMC IMMUNITY	Parameter S ESD E Radiated E EFT/Burst E Surge E Conducted E	3S EN/EN61000-4-2 3S EN/EN61000-4-3 3S EN/EN61000-4-4 3S EN/EN61000-4-5 3S EN/EN61000-4-6	Level 3, 8KV air ; Level 2, 4KV contact Level 3 Level 3 4KV/Line-Line 6KV/Line-Earth Level 3			
	EMC IMMUNITY	Parameter \$ ESD E Radiated E EFT/Burst E Surge E Conducted E Magnetic Field E	3S EN/EN61000-4-2 3S EN/EN61000-4-3 3S EN/EN61000-4-4 3S EN/EN61000-4-5	Level 3, 8KV air ; Level 2, 4KV contact Level 3 4KV/Line-Line 6KV/Line-Earth Level 3 Level 4			
	EMC IMMUNITY	Parameter \$ ESD E Radiated E EFT/Burst E Surge E Conducted E Magnetic Field E	3S EN/EN61000-4-2 3S EN/EN61000-4-3 3S EN/EN61000-4-4 3S EN/EN61000-4-5 3S EN/EN61000-4-6 3S EN/EN61000-4-8 3S EN/EN61000-4-11	Level 3, 8KV air ; Level 2, 4KV contact Level 3 4KV/Line-Line 6KV/Line-Earth Level 3 Level 4 >95% dip 0.5 periods, 30% dip 25 periods >95% interruptions 250 periods			
THERS		Parameter S ESD E Radiated E EFT/Burst E Surge E Conducted E Magnetic Field E Voltage Dips and Interruptions	3S EN/EN61000-4-2 3S EN/EN61000-4-3 3S EN/EN61000-4-4 3S EN/EN61000-4-5 3S EN/EN61000-4-6 3S EN/EN61000-4-8 3S EN/EN61000-4-11	Level 3, 8KV air ; Level 2, 4KV contact Level 3 4KV/Line-Line 6KV/Line-Earth Level 3 Level 4 >95% dip 0.5 periods, 30% dip 25 periods >95% interruptions 250 periods			
THERS	мтвғ	Parameter S ESD E Radiated E EFT/Burst E Surge E Conducted E Magnetic Field E Voltage Dips and Interruptions E 1232.28K hrs min. Telcordia SR-332 (Bellater)	3S EN/EN61000-4-2 3S EN/EN61000-4-3 3S EN/EN61000-4-4 3S EN/EN61000-4-5 3S EN/EN61000-4-6 3S EN/EN61000-4-8 3S EN/EN61000-4-11	Level 3, 8KV air ; Level 2, 4KV contact Level 3 4KV/Line-Line 6KV/Line-Earth Level 3 Level 4 >95% dip 0.5 periods, 30% dip 25 periods >95% interruptions 250 periods			

13. To duffill requirements of the fatest ETP regulation for lighting fixtures, this LED drivers can only be used befined a switch to the mains
14. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf
15. If you need the NOM (Mexico) certificate, Please contact MEAN WELL sales representative for details.
X Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx




■ BLOCK DIAGRAM

PFC fosc: 50~120KHz PWM fosc: 65KHz

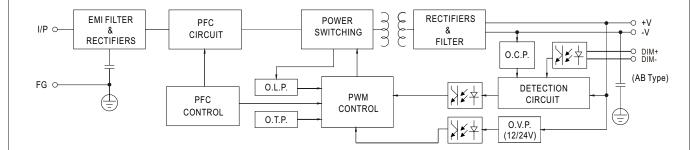


■ DRIVING METHODS OF LED MODULE

X I-V Operating Area

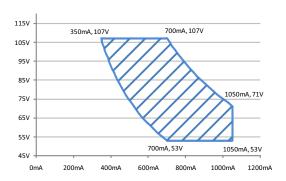


Recommend Performance Region

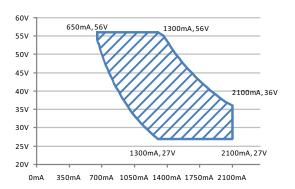

Recommend Performance Region

⊚ XLG-75-12,24

※ This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.



 In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please please contact MEAN WELL.

Typical output current normalized by rated current (%)




■ DIMMING OPERATION




imes 3 in 1 dimming function (for AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100 μ A (typ.)

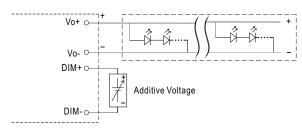


"DO NOT connect "DIM- to Vo-"

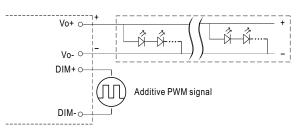



"DO NOT connect "DIM- to Vo-"


Applying additive resistance:

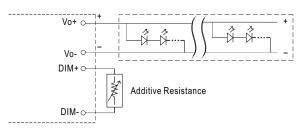

"DO NOT connect "DIM- to Vo-"










 $Note: 1.\ Min.\ dimming\ level\ is\ about\ 8\%\ and\ the\ output\ current\ is\ not\ defined\ when\ 0\%< Iout<8\%.$

2. The output current could drop down to 0% when dimming input is about 0Ω or 0Vdc, or 10V PWM signal with 0% duty cycle.





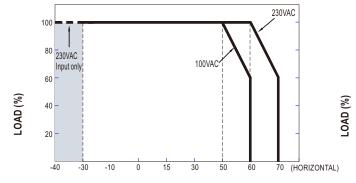

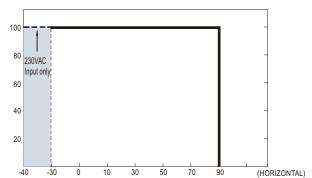


Tcase (°C)

AMBIENT TEMPERATURE, Ta (°C)

If XLG-75 operates in Constant Current mode with the rated current the maximum workable Ta is 60 $^{\circ}\mathrm{C}$ (Typ. 230VAC) or 50 $^{\circ}\mathrm{C}$ (Typ.100VAC) Below 110VAC@ -30°C may retry to 2nd setup


■ STATIC CHARACTERISTIC

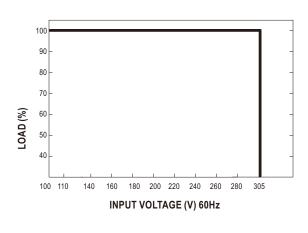

■ POWER FACTOR (PF) CHARACTERISTIC


★ Tcase at 75°C

Constant Current Mode

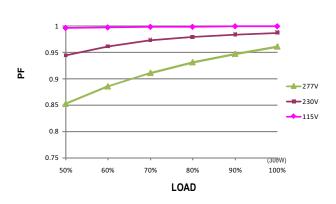

■ TOTAL HARMONIC DISTORTION (THD)


XLG-75-L Model, Tcase at 75 C

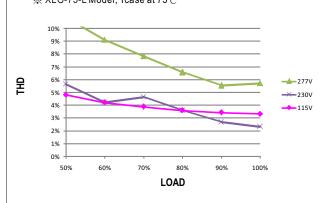

■ EFFICIENCY vs LOAD


XLG-75 series possess superior working efficiency that up to 92% can be reached in field applications.

¾ XLG-75-L Model, Tcase at 75°C

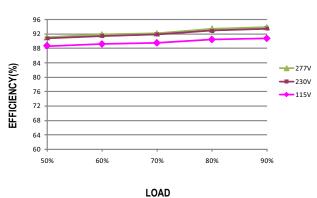




■ LIFE TIME

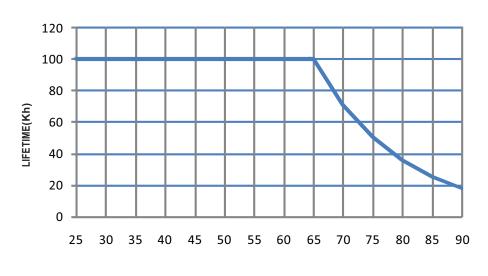

Tcase ($^{\circ}\!\mathbb{C}$)



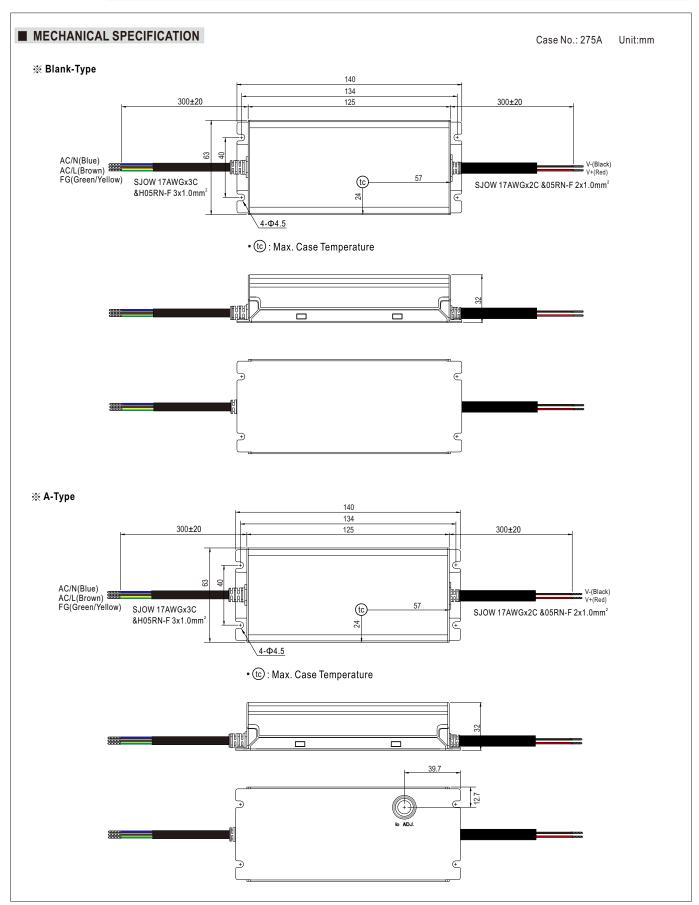


Unit:mm


Case No.: 275A




■ MECHANICAL SPECIFICATION

※ AB-Type

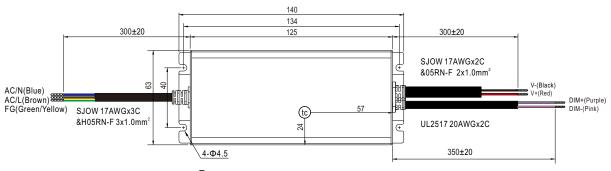



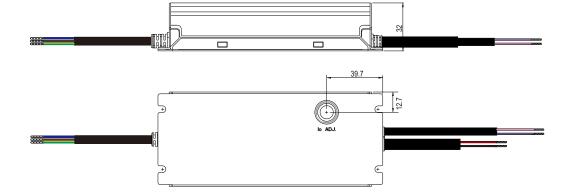

■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html